fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing volume control with 2-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP40120	3-Function Hand Shower*
FA802	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*
FP6057034	Pipe Tub Spout

Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Kit with Alternate ADA Diverter Handle: F192074T-AR

Requires 2-way diverting F1012B or F1022B valve

Bubble Level









Yaletown Tub & 3-Function Hand Shower on Slide Bar Trim Kit

F192074T



Features:

Speed Connect

Integral Stops

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 18004607019



fluid

Technical Drawing

F192074T

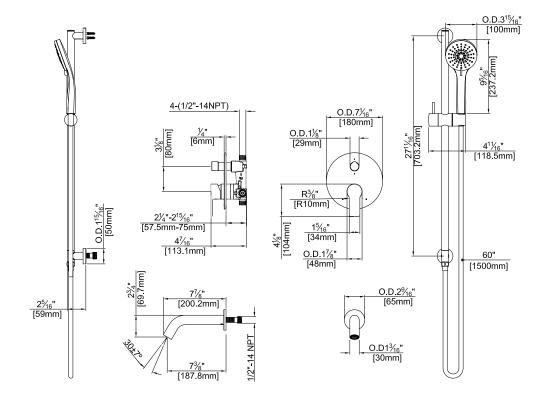

Codes and Standards:

ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed (excluding MB Version), ADA Compliant

Warranty:

NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192074T-AR

Kit with square style cover plate & diverter handle: **F192074T-S**

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F191019T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019



F192074T March 2025