

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1012B or F1022B valve pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:


F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP6006008	16" Shower Arm
FP6002150	8" Round Rain Showerhead
FP6095035	Slim Tub Spout

Yaletown Rain Showerhead & Tub Spout Trim Kit

F192202T-ABS



Kit with Alternate ADA Diverter Handle: **F192202T-ABS-AR**



Features:

Requires 2-way diverting F1012B or F1022B valve







Integral Stops Bubble Level

Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB)

Technical Drawing

F192202T-ABS

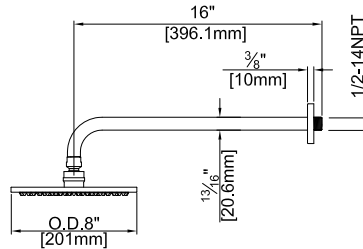

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, EPA Watersense Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192202T-ABS-AR

Kit with square style cover plate & diverter handle: **F192202T-ABS-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tab Spout 4.5 gpm @ 60 psig