fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing volume control with 2-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP6016008	8" Shower Arm
FP20100	5-Function Showerhead
FP6001048	Round Hand Shower
FA105	Slide Bar
FP6002047	Wall Outlet
FP6001006	60" Shower Hose

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192204T-AR**





Features:



Requires 2-way diverting F1012B or F1022B valve



Integral Stops



Bubble Level



Speed Connect

Yaletown 5-Function Shower & **Round Hand Shower on Slide Bar**

F192204T



Polished Chrome (CP) and Brushed Nickel (BN)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 18004607019



fluid

Technical Drawing

F192204T

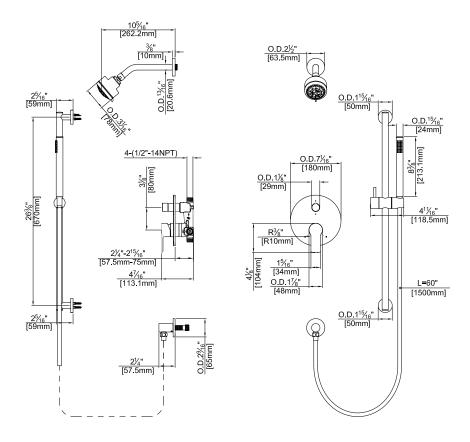







Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192204T-AR

Kit with square style cover plate & diverter handle: **F192204T-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm:

F192204T-15

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 18004607019



F192204T March 2025