

Specifications:


- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way diverter
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Sleeve Tube and Cap
FP6019041	Yaletown Handle
FP801013	Diverter Sleeve
FP605652	Diverter Handle
FP6001142-2PB	Round Cover Plate
FP20100	5-Function Showerhead
FP6016008	8" Shower Arm
FP6095035	Slim Tub Spout

Yaletown 5-Function Showerhead & Tub Spout Trim Kit

F192305T



Kit with Alternate ADA Diverter Handle: **F192305T-AR**



Features:

Requires 2-way diverting F1012B or F1022B valve


Integral Stops Bubble Level

Speed Connect

Polished Chrome (CP), Brushed Nickel (BN) and Matte Black (MB)

Technical Drawing

F192305T

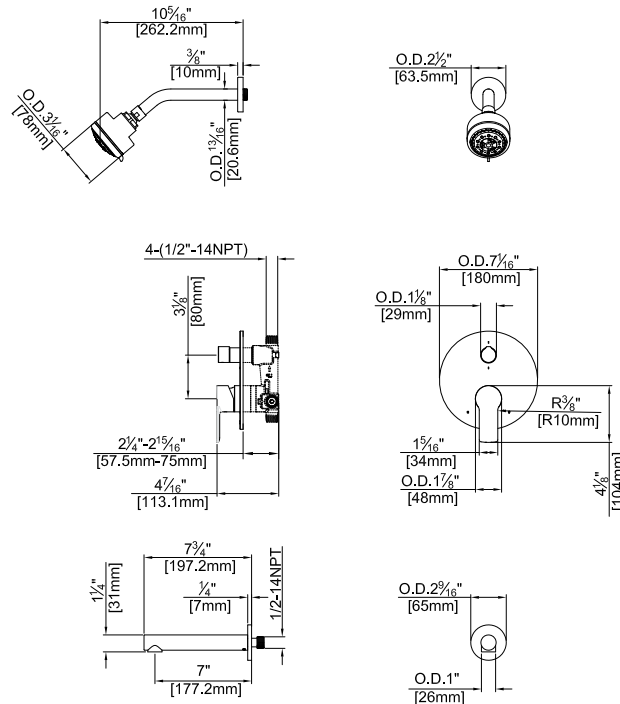

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192305T-AR

Kit with square style cover plate & diverter handle: **F192305T-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F192305T-15**