fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way, two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Cartridge Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Cover Plate
FP6001150	8" Square Rain Showerhead
FP6007108	16" Shower Arm
FP40120	3-Function Hand Shower
FA802	Slide Bar With Integral Outlet
FP6001006	60" Shower Hose
FP6096035	Square Tub Spout

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: F193224T-ABS-AR

Features:







Bubble Level



Speed Connect

Yaletown Tub, Rain Shower & Hand Shower on Slide Bar Trim Kit

F193224T-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1 800 460 7019



fluid

Technical Drawing

F193224T-ABS

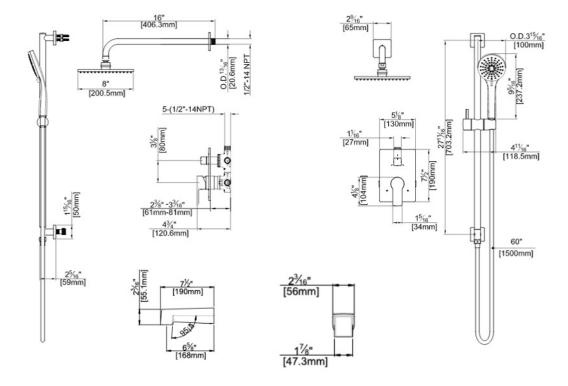









Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed, EPA Watersense Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F193224T-ABS-AR

Kit with square style cover plate & diverter handle: **F193224T-ABS-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F193224T-ABS-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 18004607019



F193224T-ABS March 2025