

Specifications:

- Metal construction for durability and reliability
- Pressure balancing volume control with 2-way, single handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019041	Yaletown Handle
FP6001035-2PS	Round Cover Plate
FP6016008	8" Shower Arm
FP6000350	6" Showerhead
FP40120	3-Function Hand Shower
FA101	Slide Bar
FP6082048	Wall Outlet
FP6001006	60" Shower Hose

Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops  Bubble Level

Yaletown 6" Shower & Hand Shower Trim Kit


F194105T



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F194105T

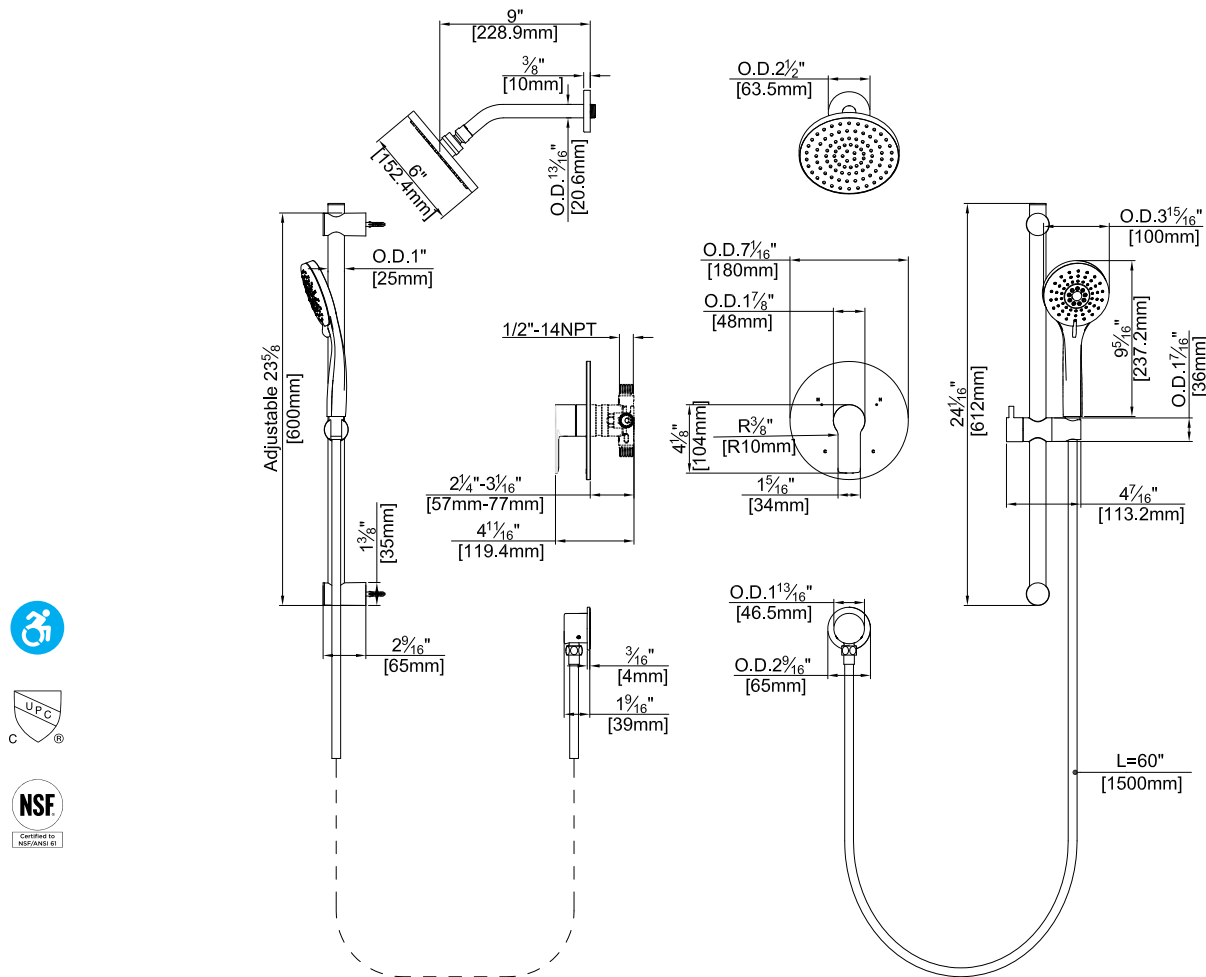

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.
2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower-
head & Hand Shower @ 1.5 gpm:

F194105T-15