

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way diverter
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing, in solder, PEX or PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Sleeve Tube and Cap
FP801013	Diverter Sleeve
FP6001142-2PB	Round Cover Plate
FP605652	Round Diverter Handle
FP6019041	Yaletown Handle
FP6006008	16" Shower Arm
FP6002150	8" Round Rain Showerhead
FP6001048	Round Hand Shower
FP6001010	Hand Shower Holder
FP6002047	Brass Wall Outlet
FP6001006	60" Shower Hose

**sharing available where allowed by code

Kit with Alternate ADA Diverter Handle: **F192201T-ABS-AR**



Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops  Bubble Level

 Speed Connect

Yaletown Rain Showerhead & Hand Shower Wand Trim Kit


F192201T-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F192201T-ABS

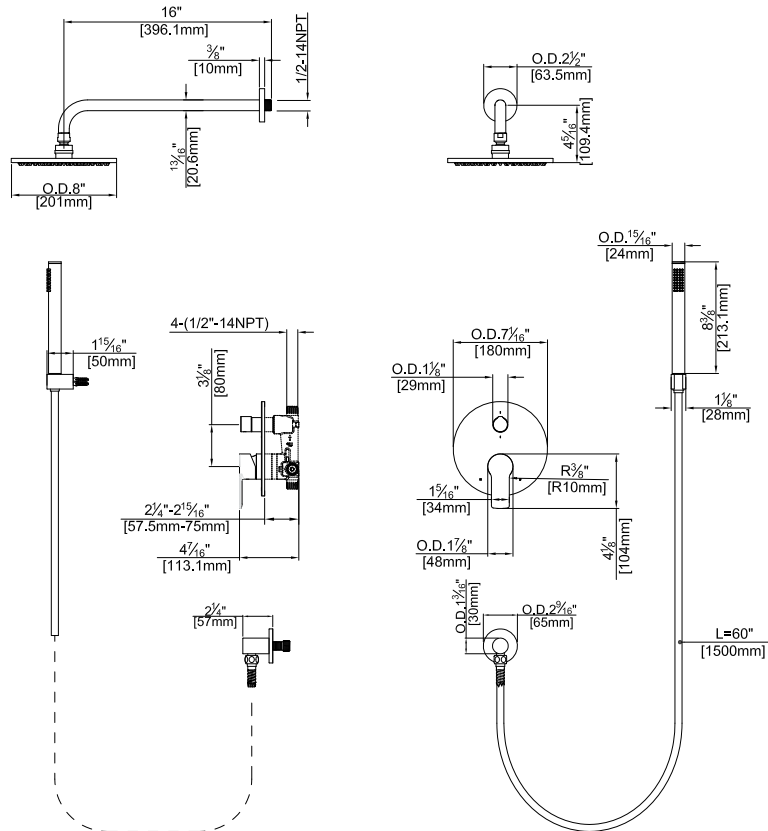

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed, ADA Compliant

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F192201T-ABS-AR

Kit with square style cover plate & diverter handle: **F192201T-ABS-S**

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F192201T-15**