

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP801013	Diverter Sleeve
FP601143-2PB	Square Cover Plate
FP6007108	Square Diverter Handle
FP6016041	Quad / Jovian Handle
FP6027008	8" Shower Arm
FP10130	4" Showerhead
FP6004048	Square Hand Shower
FA104	Slide Bar
FP6001047	Wall Outlet
FP6001006	60" Shower Hose

**sharing available where allowed by code

Kit with Alternate Handle: **F212012T-Q-AS**




Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops

 Bubble Level

 Speed Connect

Jovian 4" Showerhead & Hand Shower Trim Kit


F212012T-Q



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F212012T-Q

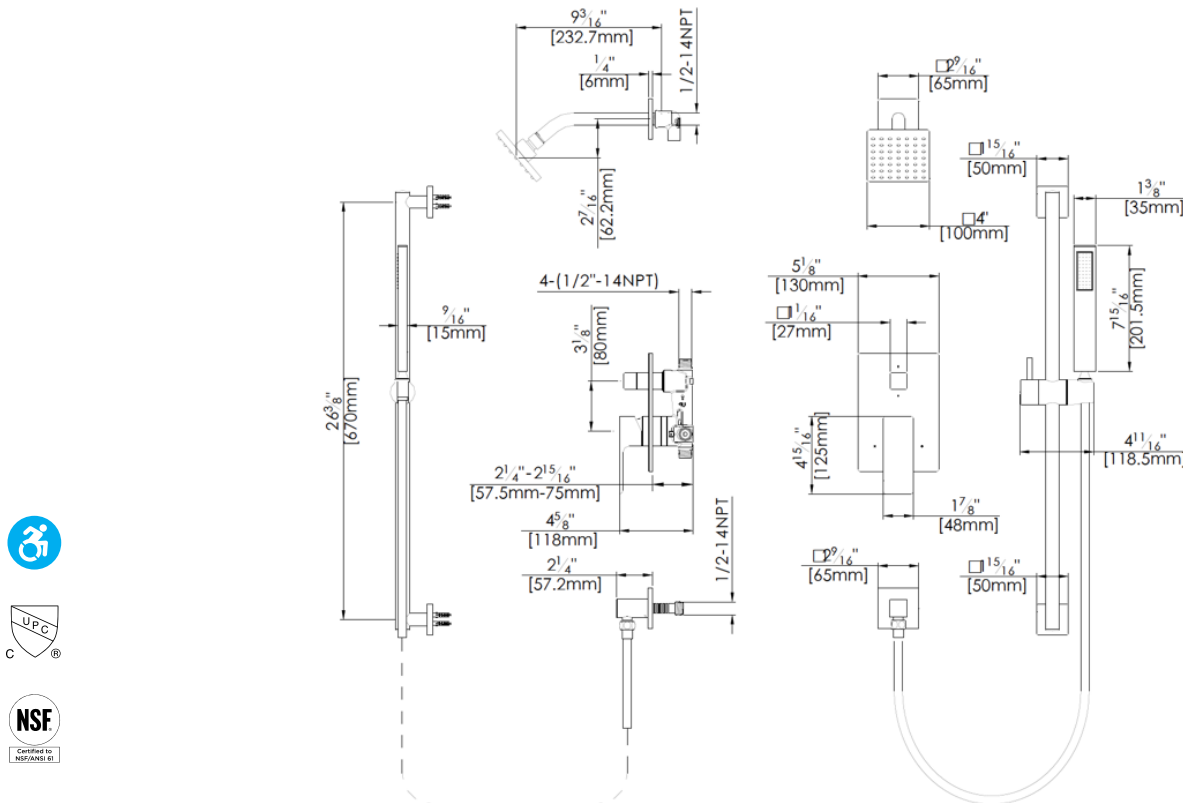

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower-
head and Hand Shower @ 1.5 gpm:

F212012T-Q-15