

Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6016041	Quad / Jovian Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP601143-2PB	Square Cover Plate
FP6027008	8" Shower Arm
FP20100	5-Function Showerhead
FP6004048	Square Hand Shower
FA104	Slide Bar
FP6001047	Wall Outlet
FP6001006	60" Shower Hose

Kit with Alternate Handle: **F212204T-Q-AS**




Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops

 Bubble Level

 Speed Connect

Jovian 5-Function Showerhead & Hand Shower Trim Kit

F212204T-Q




Polished Chrome (CP) and Brushed Nickel (BN)

**sharing available where allowed by code

Technical Drawing

F212204T-Q

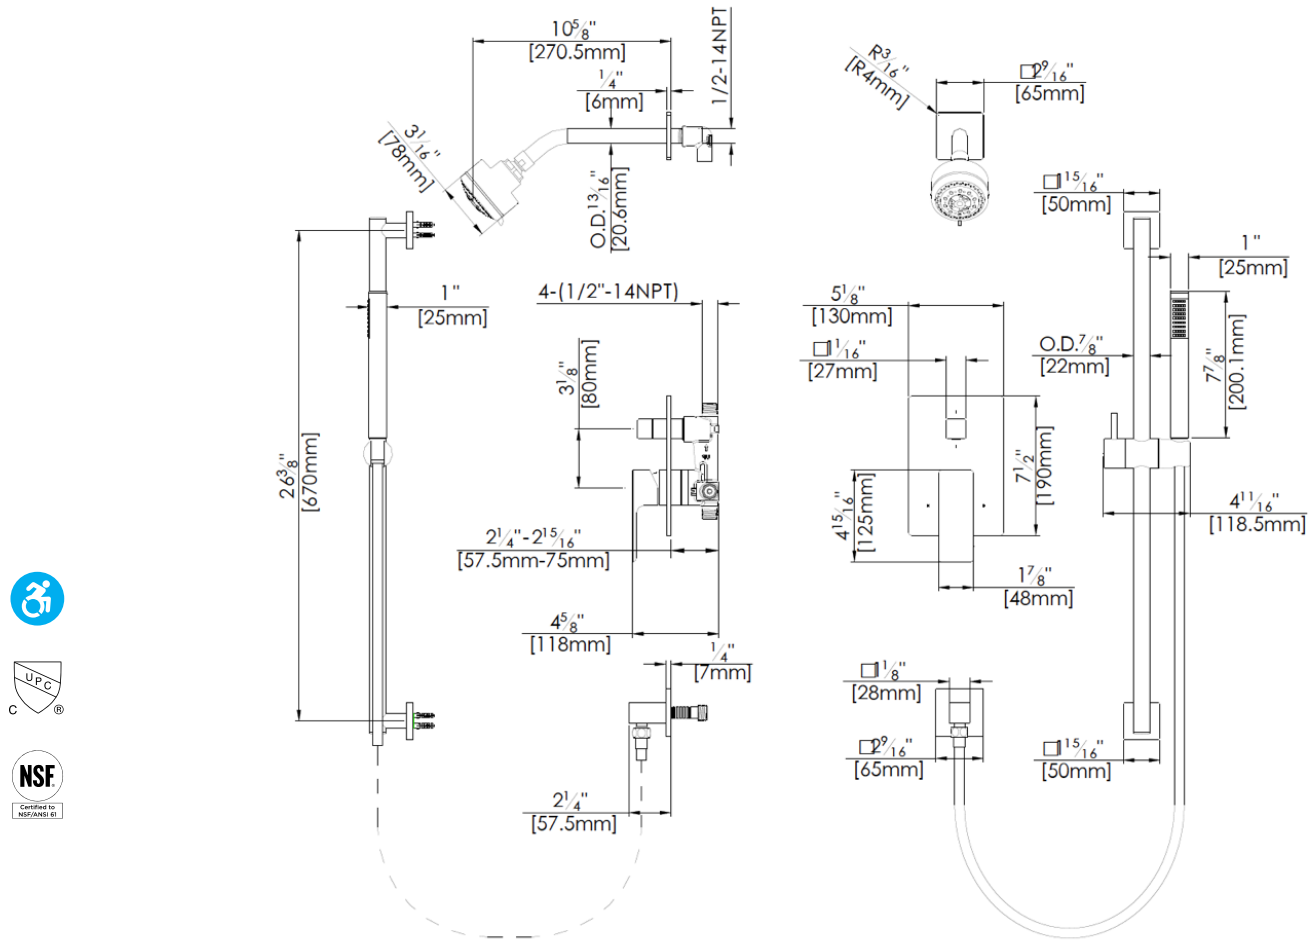

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm:

F212204T-Q-15