

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way diverter
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP801013	Diverter Sleeve
FP601143-2PB	Square Cover Plate
FP6007108	Square Diverter Handle
FP6016041	Quad / Jovian Handle
FP20100	5-Function Showerhead
FP6027008	8" Shower Arm
FP6016034	Quad / Jovian Tub Spout

Kit with Alternate Handle: **F212305T-Q-AS**



Jovian Tub & 5-Function Shower Trim, (Two handle)

F212305T-Q



Features:

Requires 2-way diverting F1012B or F1022B valve


Integral Stops Bubble Level

Speed Connect

Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F212305T-Q

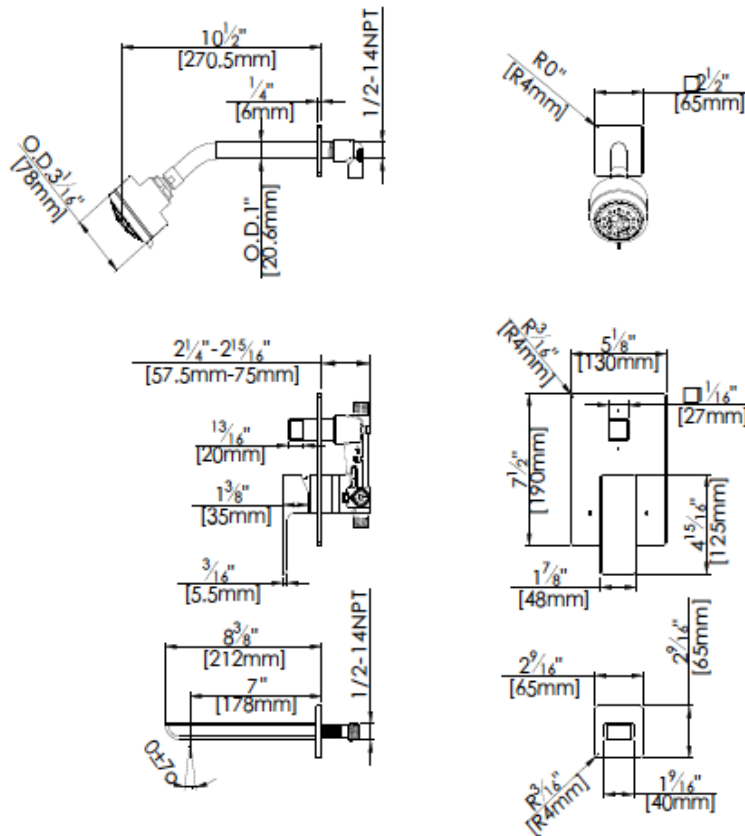

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead
@ 1.5 gpm: **F212305T-Q-15**