# fluid

#### **Specifications:**

- Metal construction
- Pressure balancing volume control with 3-way two handle diverting
- → Maximum temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

#### **Components:**

. Sleeve Tube and Cap
. Quad / Jovian Handle
. Diverter Sleeve
. Diverter Handle
. Square Cover Plate
. 3" Ceiling Shower Arm
.8" Square Rain Showerhead
. 3-Function Hand Shower
. Slide Bar With Integral Outlet
. 60" Shower Hose
. Quad / Jovian Tub Spout

\*\*sharing available where allowed by code

 $\label{lem:conditional} \textbf{Kit with Alternate Handle: } \textbf{F213009T-Q-ABS}$ 





#### **Features:**







Bubble Level



Speed Connect

# Jovian Tub, 8" Ceiling Rain Shower & Hand Shower Trim Kit

F213009T-Q-ABS




Polished Chrome (CP) and Brushed Nickel (BN)

# fluid

### **Technical Drawing**

### F213009T-Q-ABS

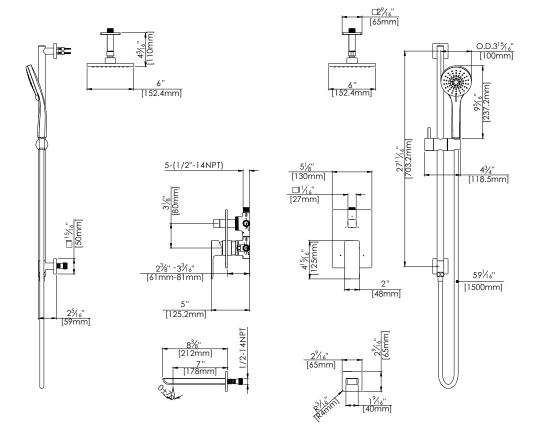

### **Warranty:**

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

#### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

#### Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F213009T-Q-ABS-15**