fluid

Specifications:

- Metal construction
- Pressure balancing volume control with 3-way, two handle diverting
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

| F1001T | . Sleeve Tube and Cap |
|---------------|----------------------------------|
| FP6016041 | Quad / Jovian Handle |
| FP801013 | . Diverter Sleeve |
| FP605752 | . Diverter Handle |
| FP6001143-3PB | . Square Cover Plate |
| FP6027008 | 8" Shower Arm |
| FP6000150 | 6" Showerhead |
| FP40120 | 3-Function Hand Shower |
| FA803 | . Slide Bar With Integral Outlet |
| FP6001006 | 60" Shower Hose |
| FP6016034 | . Quad / Jovian Tub Spout |
| | |


**sharing available where allowed by code

Kit with Alternate Handle: **F213027T-Q-AS**





Features:







Bubble Level



Speed Connect

Jovian Tub, 6" Shower & 3-Function Hand Shower Trim Kit

F213027T-Q




Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F213027T-Q

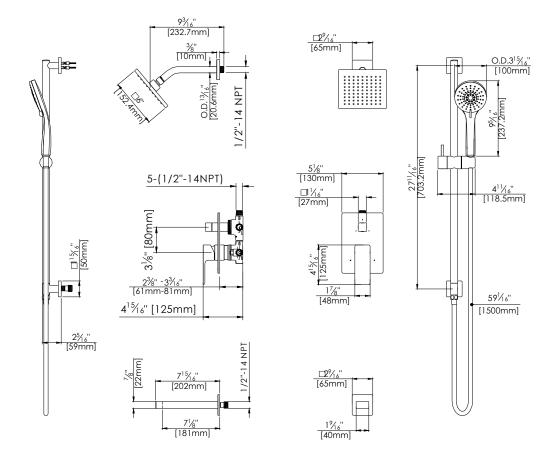



NSF.

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Showerhead @ 1.5 gpm: **F213027T-Q-15**