fluid

Specifications:

- Metal construction
- Pressure balancing volume control with 3-way, two handle diverting
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve Tube and Cap
FP6016041	Quad / Jovian Handle
FP801013	Diverter Sleeve
FP605752	Diverter Handle
FP6001143-3PB	Square Cover Plate
FP6021308	3" Ceiling Shower Arm
FP6001150	8" Square Rain Showerhead
FP6027008	8" Shower Arm
FP6000150	6" Showerhead
FP6001006	60" Shower Hose
FA803	Slide Bar With Integral Outlet
FP40120	3-Function Hand Shower

**sharing available where allowed by code

Kit with Alternate Handle: **F213036T-Q-ABS-AS**





O

Features:







Bubble Level



Speed Connect

Jovian Double Showerhead and 3-Function Hand Shower Trim Kit

F213036T-Q-ABS





Polished Chrome (CP) and Brushed Nickel (BN)

fluid

Technical Drawing

F213036T-Q-ABS

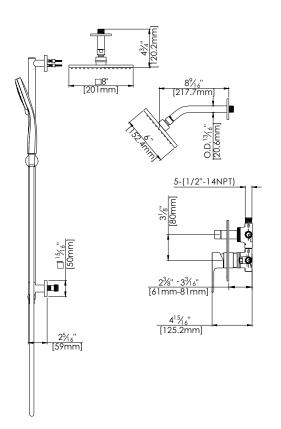

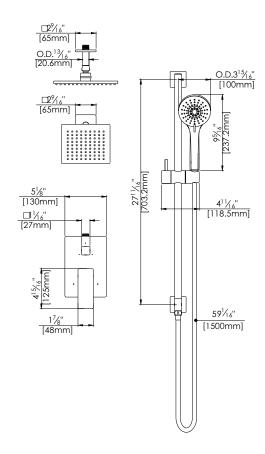







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerheads 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower & Showerhead @ 1.5 gpm: **F213036T-Q-ABS-15**