

## Specifications:

- Metal construction
- Pressure balancing with 2-way single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)


## Components:

F1001T .....	Sleeve tube and cap
FP6016041 .....	Quad / Jovian Handle
FP6001033-2PS .....	Square Cover Plate
FP6027008 .....	8" Shower Arm
FP6000150 .....	6" Showerhead
FP40120 .....	3-Function Hand Shower
FA101 .....	Slide Bar
FP6081048 .....	Wall Outlet
FP6001006 .....	60" Shower Hose

## Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops

 Bubble Level

## Jovian 6" Showerhead & 3-Function Hand Shower Trim Kit


F214105T-Q



Polished Chrome (CP) and Brushed Nickel (BN)

## Technical Drawing

F214105T-Q

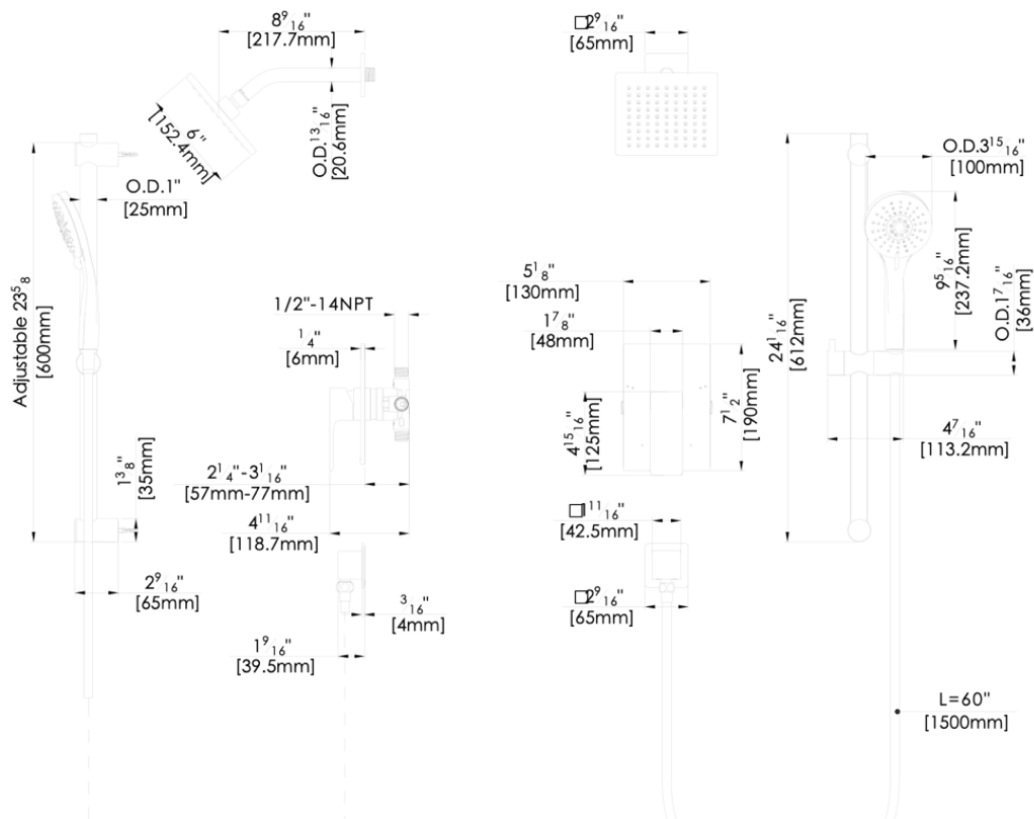

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

## Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead  
& Hand Shower @ 1.5 gpm:

**F214105T-Q-15**