

Specifications:

- Metal construction
- Pressure balancing with 2-way, single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001T	Sleeve tube and cap
FP6016041	Quad / Jovian Handle
FP6001033-2PS	Square Cover Plate
FP6027008	8" Shower Arm
FP10130	4" Square Showerhead
FP6004048	Square Hand Shower
FA101	Slide Bar
FP6081048	Wall Outlet
FP6001006	60" Shower Hose

Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops

 Bubble Level

Jovian 4" Showerhead & Hand Shower Trim Kit (single handle)


F214106T-Q



Polished Chrome (CP) and Brushed Nickel (BN)

Technical Drawing

F214106T-Q

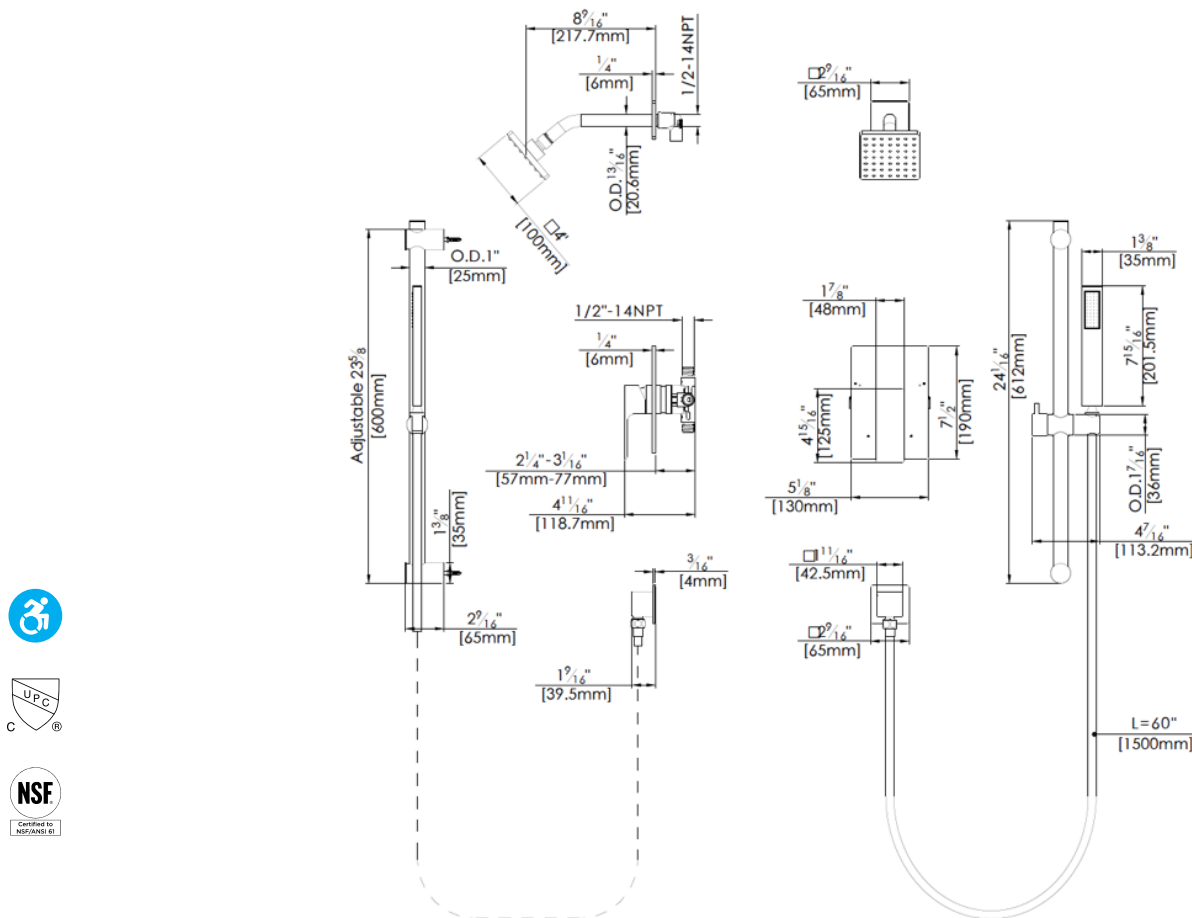

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead
& Hand Shower @ 1.5 gpm:

F214106T-Q-15