

## Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way diverter
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

## Components:

|                    |                           |
|--------------------|---------------------------|
| F1001T .....       | Sleeve Tube and Cap       |
| FP801013 .....     | Diverter Sleeve           |
| FP601143-2PB ..... | Square Cover Plate        |
| FP6007108 .....    | Square Diverter Handle    |
| FP6016041 .....    | Quad / Jovian Handle      |
| FP6001150 .....    | 8" Square Rain Showerhead |
| FP6007108 .....    | 16" Shower Arm            |
| FP6016034 .....    | Quad / Jovian Tub Spout   |

Kit with Alternate Handle: **F212202T-Q-ABS-AS**



## Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops

 Bubble Level

 Speed Connect

## Jovian Tub & 8" Rain Shower Trim Kit, (Two handle)







F212202T-Q-ABS



Polished Chrome (CP) and Brushed Nickel (BN)

## Technical Drawing

## F212202T-Q-ABS

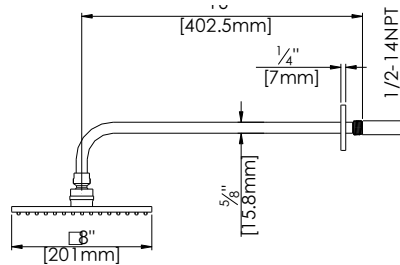

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
ADA Compliant  
EPA Watersense Listed

## Flow Rate:

Showerhead 1.8 gpm @ 60 psig  
Tub Spout 4.5 gpm @ 60 psig