SPECIFICATIONS

Customer Service: 1-800-460-7019

www.fluidfaucets.com

SOLUTIONS INTERNATIONAL

Specifications

- Heavy brass construction for durability and reliability
- Kerox ceramic cartridge ensures life long trouble free
- Single Lever handle operation allows both volume and temperature control
- Max-temperature limit stop for added safety.
- SSi Eco-Care pivot aerator 1.5 gpm (5.7 lpm) at 60 psi
- SSi "Quick Connector" for easy spout installation
- Single cover plate trim available
- Available waste pop-up drain
- Must be used together with the valve body F3000B for horizontal installation
- Used as wall mounted tub filler when flow straighter is used in lieu of aerator (F17008T-S with flow straighter)

Finish

- CP (Polished Chrome)
- PVD-PN (PVD Polished Nickel)

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1
- NSF61-9
- ADA
- IAPMO / cUPC Listed (pending)
- EPA Watersense Listed (pending)
- AB1953 California Lead Plumbing Law Certified (pending)

Warranty

- Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
- 2 Year Limited Warranty on all industrial, commercial and business applications.


fluid Symmetry Series Single Lever **Joystick Wall Mounted Faucet Model: F17008T**











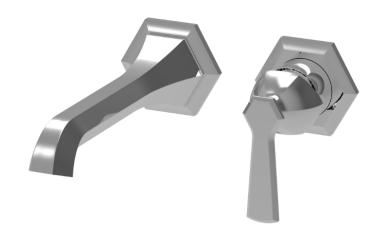





Model: F17008T

