

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant when alternate handle below is selected
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

| | |
|-----------------------|------------------------|
| F1001TMB | Sleeve Tube and Cap |
| FP6024041MB | Blade Handle |
| FP801013MB | Diverter Sleeve Tube |
| FP605652MB | Diverter Handle |
| FP6001142MB-2PB | Cover Plate |
| FP6016008MB | 8" Shower Arm |
| FP6000350MB | 5 function Shower Head |
| FP6057034MB | Pipe Tub Spout |

Kit with Alternate Handle: **F242005TMB-AR**



Requires 2-Way diverting F1012B or F1022B valve



Bubble Level




Speed Connect



Integral Stops

Citi Shower Tub & Shower Head Trim Kit


F242005TMB

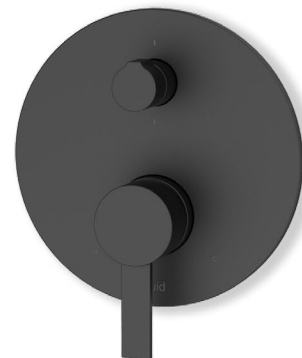

Matte Black (MB)

Technical Drawing

F242005TMB

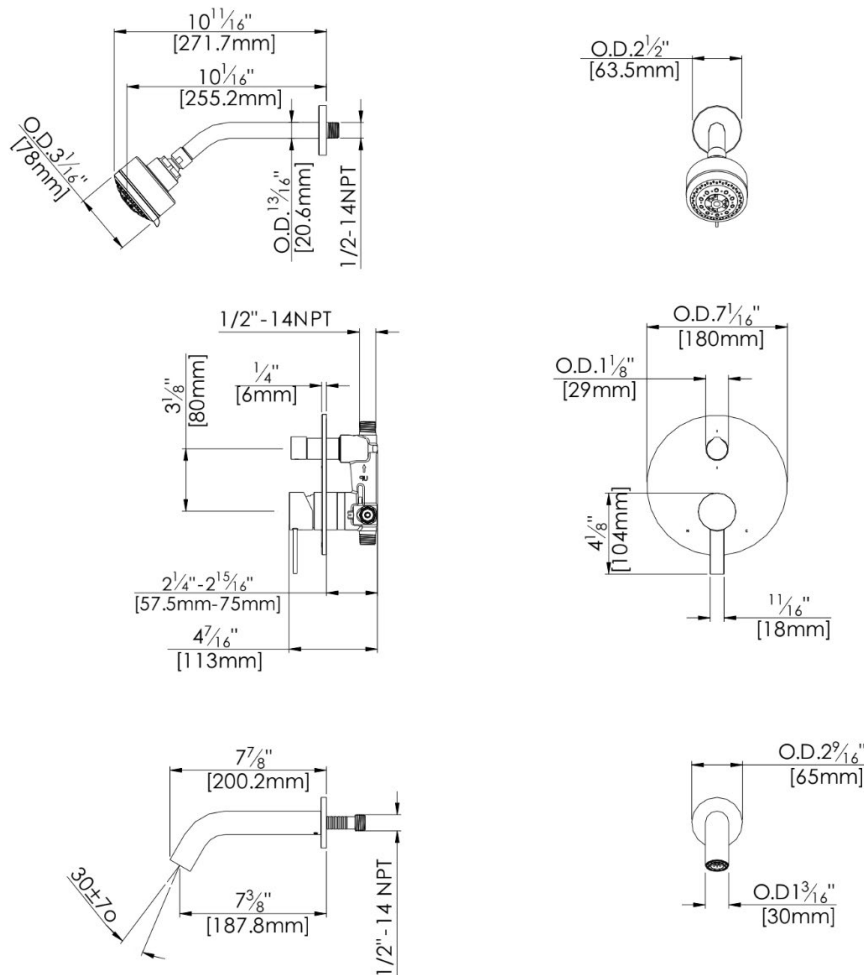

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F242005TMB-AR

Kit with square style cover plate & diverter handle: **F242005TMB-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: **F242005TMB-15**