fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 3-way two handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → ADA compliant with alternate handle below
- → Requires the fluid F1023B or the F1003B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve
FP6024041MB	Blade Handle
FP801013MB	Diverter Sleeve
FP605652MB	Diverter Handle
FP6001142MB-3PB	Round Cover Plate
FP6018308MB	3" Ceiling shower arm
FP6002150MB	8" Shower Head
FP40130MB	3-Function Hand Shower
FA802MB	Slide Bar With Integral Outlet
FP6001007MB	60" Shower Hose
FP6057034MB	8" Pipe Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: **F243216TMB-AR**





Features:








Bubble Level



 ${\sf Speed\,Connect}$

Citi Tub, 8" Ceiling Rain Shower & 3 Funtion Hand Shower Trim Kit

F243216TMB

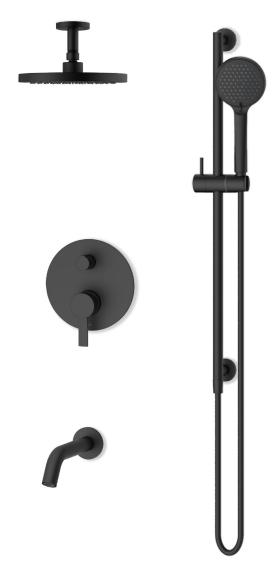

Matte Black (MB)

F243216TMB May 2025

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com


Toll free: 1-800-460-7019




fluid

Technical Drawing

F243216TMB
















Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with ADA diverter handle:

F243216TMB-AR

Kit with square style cover plate & diverter handle: **F243216TMB-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F243216TMB-15**

F243216TMB May 2025

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1-800-460-7019

