fluid

fixtures for life

Specifications:

- Stainless Steel Construction
- Designed to replace a standard wall-mounted showerhead and arm with a slide bar system featuring a built-in water outlet and diverter to direct flow to either the showerhead or hand shower
- Works with the existing rough-in valve—no need to alter plumbing behind the wall or modify the shower wall
- Two mounting options: drill into shower wall or drill-free using only the supplied waterproof adhesive
- 3-Function Hand Shower
- Adjustable Slide Bar allows you to change hand shower height
- 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- Optional 65 mm escutcheons available for larger wall openings (sold separately)

Components:

FP933002	18" Main Slide Bar	(Round Trim)

- FP900208-TALL 8" Shower Arm with 6" Riser
- FP40120 3-Function Round Hand Shower *
- FP6000350 6" Round Shower Head
- FP6001006 60" Shower Hose *

Matte Black Specific Components FP6001007MB Hose | FP40130MB Hand Shower

Switch Retrofit Shower & Hand Shower Trim Kit

F9508-001-18T



Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

F9508-001-18T May 2025





fluid

Technical Drawing



F9508-001-18T

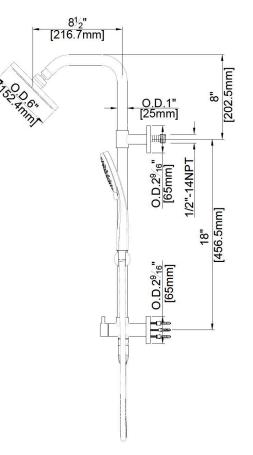

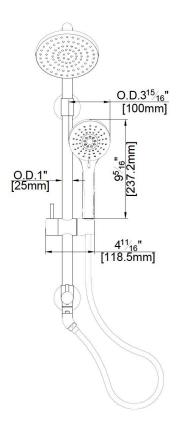

Warranty

3

UPC

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

fluid by **Sustainable Solutions** Email: help@sustainablesolutions.com Toll Free: 1 800 460 7019

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead and Hand Shower @ 1.5 gpm: **F9508-001-18T-15**

