

Specifications:

- ➔ **Stainless Steel Construction**
- ➔ **Rainshower Head** provides a soft, gentle water flow
- ➔ **3-Function Hand Shower**
- ➔ **Diverting Tub Spout** features slip fit installation
- ➔ **Adjustable Slide Bar** allows you to change hand shower height
- ➔ **16" Swivelling Switch Shower Arm** for adjustable positioning
- ➔ **Reversible Hose Elbow** installs left or right
- ➔ **Water Inlet** is located at the top installation post
- ➔ **Built in Check Valve** prevents backflow
- ➔ **Requires the fluid F1001B or F1021B** pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001035-1PB	Round Cover Plate
FP6018041	Utopia handle
FP933000	26" Main Slide Bar (Round Trim)
FP900216	16" Shower Arm with 6" Riser
FP40120	3-Function Round Hand Shower
FP6002150	8" Round Rain Showerhead
FP6001006	60" Shower Hose
FP6098034L	Curved Diverting Tub Spout


Features:

 Requires Non-Diverting F1001B or F1021B valve

 Integral Stops

 Bubble Level

 Speed Connect (Slide Bar)

 Slip Fit (Tub Spout)

Utopia Switch Tub, Shower & Hand Shower Trim Kit


F181209T



Polished Chrome (CP), and Brushed Nickel (BN)

Technical Drawing

F181209T

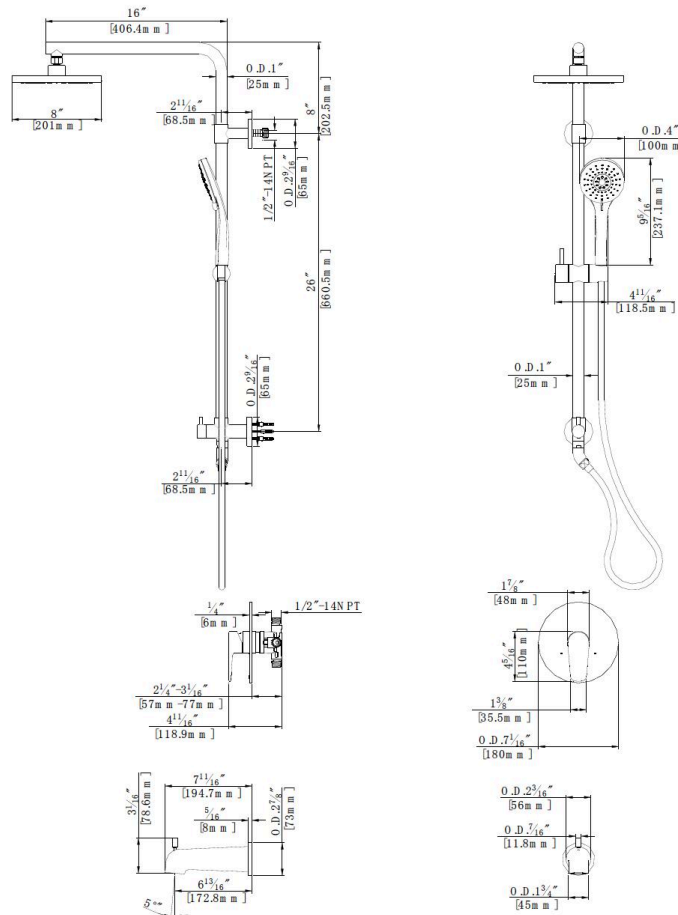

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

EPA Watersense Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F181209T-15**

fluid by **Sustainable Solutions**

Email: help@sustainablesolutions.com

Toll Free: 1 800 460 7019

F181209T May 2025

WEBSITE