## fluid

### **Specifications:**


- Stainless Steel Construction
- 3-Function Hand Shower
- Diverting Tub Spout features slip fit installation
- Adjustable Slide Bar allows you to change hand shower height
- > 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- > Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- → Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

#### **Components:**

F1001T	Sleeve Tube and Cap
FP6001033-1PB	Square Cover Plate
FP6016041	Quad Handle
FP933000	26" Main Slide Bar (Round Trim)
FP900208-TALL	8" Shower Arm with 6" Riser
FP40120	3-Function Round Hand Shower
FP6000150	6" Square Showerhead
FP6001006	60" Shower Hose
FP6097034	Square Diverting Tub Spout

### Features:







Bubble Level



Speed Connect (Slide Bar)



Slip Fit (Tub Spout)

# Quad Switch Tub, Shower & Hand Shower Trim Kit

F161071T-TALL



Polished Chrome (CP), and Brushed Nickel (BN)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

**Toll Free:** 18004607019


F161071T-TALL May 2025

**WEBSITE** 

## fluid

#### **Technical Drawing**

### F161071T-TALL

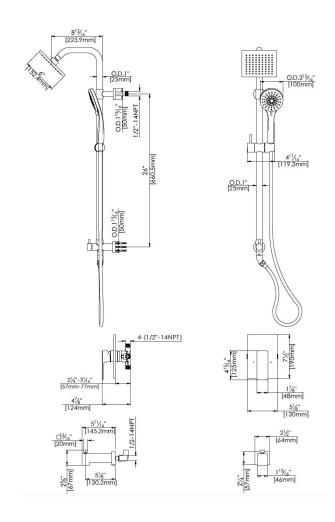





#### Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

#### **Codes and Standards:**

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

#### Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
Low Flow Alternative: Showerhead
and Hand Shower @ 1.5 gpm: **F161071T-TALL-15** 

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

**Toll Free:** 18004607019

F161071T-TALL May 2025

**WEBSITE**