

Specifications:

- ➔ **Stainless Steel Construction**
- ➔ **3-Function Hand Shower**
- ➔ **5-Function Shower Head**
- ➔ **Adjustable Slide Bar** allows you to change hand shower height
- ➔ **Diverting Tub Spout** features slip fit installation
- ➔ **8" Swivelling Switch Shower Arm** for adjustable positioning
- ➔ **Reversible Hose Elbow** installs left or right
- ➔ **Water Inlet** is located at the top installation post
- ➔ **Built in Check Valve** prevents backflow
- ➔ **Requires the fluid F1001B or F1021B** pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001033-1PB	Square Cover Plate
FP6016041	Quad Handle
FP933003	18" Main Slide Bar (Square Trim)
FP900208	8" Shower Arm with 2" Riser
FP40120	3-Function Round Hand Shower
FP20100	5-Function Showerhead
FP6001006	60" Shower Hose
FP6096034	Square Diverting Tub Spout

Features:



Requires Non-Diverting F1001B or F1021B valve



Integral Stops



Bubble Level



Speed Connect
(Slide Bar)



Slip Fit
(Tub Spout)

Quad Switch Tub, Shower & Hand Shower Trim Kit


F161240T-18



Polished Chrome (CP), and Brushed Nickel (BN)

Technical Drawing

F161240T-18

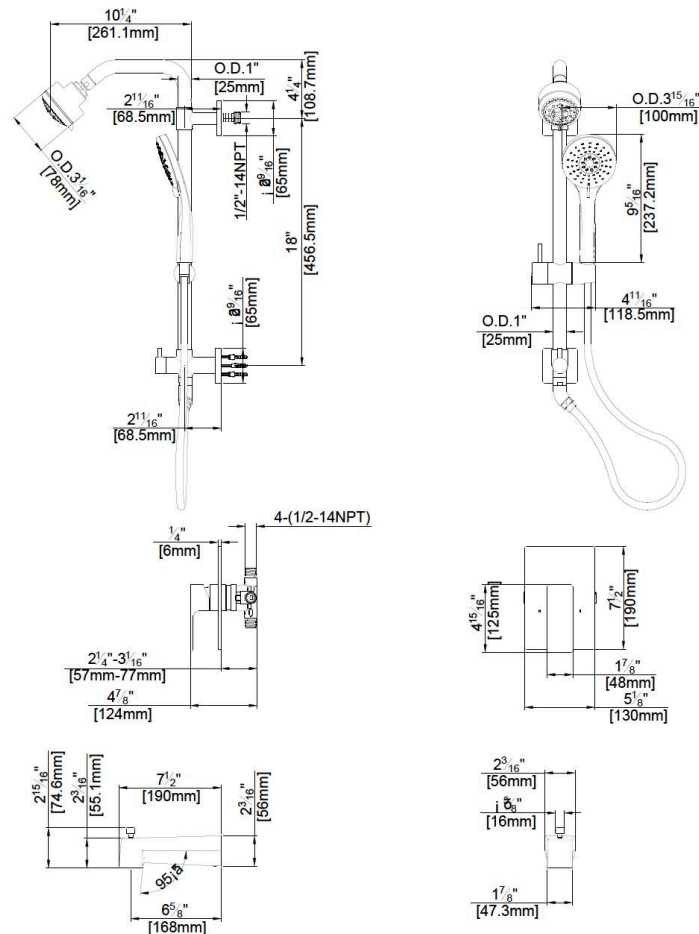

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead and Hand Shower @ 1.5 gpm:

F161240T-18-15