fluid

fixtures for life

Quad Switch Tub, Shower &

Hand Shower Trim Kit

F161241T-18

Specifications:

- Stainless Steel Construction
- 3-Function Hand Shower
- Diverting Tub Spout features slip fit installation
- > Adjustable Slide Bar allows you to change hand shower height
- 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- → Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001033-1PB	Square Cover Plate
FP6016041	Quad Handle
FP933003	18" Main Slide Bar (Square Trim)
FP900208	8" Shower Arm with 2" Riser
FP40120	3-Function Round Hand Shower
FP6000150	6" Square Showerhead
FP6001006	60" Shower Hose
FP6096034	Square Diverting Tub Spout

Features:



Requires Non-Diverting F1001B or F1021B valve

Integral Stops

Speed Connect (Slide Bar)



Polished Chrome (CP), and Brushed Nickel (BN)





fluid by Sustainable Solutions

Email: help@sustainablesolutions.com Toll Free: 18004607019 F161241T-18 May 2025




fluid



Technical Drawing

F161241T-18

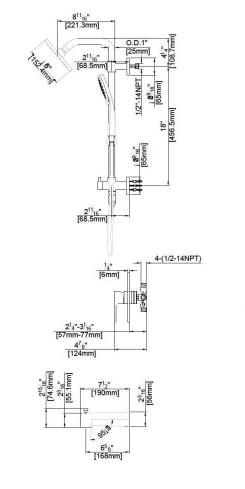



Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

O.D.3¹⁵16" [100mm]

4¹¹16" [118.5mm]

[48mm] 5¹8" [130mm]

O.D.1"

4¹⁵₁₆"

2716 [56mm]

17/8" [47.3mm]

> Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig Low Flow Alternative: Showerhead and Hand Shower @ 1.5 gpm: **F161241T-18-15**

F161241T-18 May 2025

fluid by **Sustainable Solutions** Email: help@sustainablesolutions.com Toll Free: 18004607019

WEBSITE