fluid

fixtures for life

Specifications:

- Stainless Steel Construction
- Rainshower Head provides a soft, gentle water flow
- 3-Function Hand Shower
- 5-Function Shower Head
- Adjustable Slide Bar allows you to change hand shower height
- 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001035-1PB	Round Cover Plate
FP6024041	Blade Handle
FP933000	26" Main Slide Bar (Round Trim)
FP900208-TALL	8" Shower Arm with 6" Riser
FP40120	3-Function Round Hand Shower *
FP20100	5-Function Showerhead
FP6001006	60" Shower Hose *

Citi Switch Shower & Hand Shower Trim Kit

F241013T-TALL



Features:



Requires Non-Diverting F1001B or F1021B valve

പ്പ

Bubble Level

Integral Stops Speed Connect (Slide Bar)
 Matte Black Specific Components

 FP6001007MB Hose
 FP40130MB Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com Toll Free: 18004607019 F241013T-TALL May 2025




fluid



Technical Drawing

F241013T-TALL

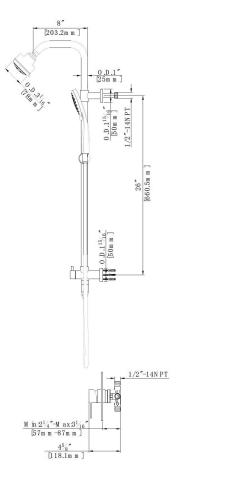



c Second

Certified to NSF/ANSI 61

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

fluid by **Sustainable Solutions** Email: help@sustainablesolutions.com Toll Free: 18004607019

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

4¹¹/₁₆" [119.3m m]

0.D.1" [25m m]

0.D.7¹/₁₆

[18m m 0.D.1⁷/₈ [48m m

> Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Low Flow Alternative: Hand Shower @ 1.5 gpm: **F241013T-TALL-15**

