fluid

fixtures for life

Citi Switch Tub, Shower &

Hand Shower Trim Kit

F241235T-18

Specifications:

- Stainless Steel Construction
- 3-Function Hand Shower
- Diverting Tub Spout features slip fit installation
- Adjustable Slide Bar allows you to change hand shower height
- → 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001033-1PB	Square Cover Plate
FP6024041	Blade Handle
FP933003	18" Main Slide Bar (Square Trim)
FP900208	8" Shower Arm with 2" Riser
FP40120	3-Function Round Hand Shower
FP10130	4" Square Shower Head
FP6001006	60" Shower Hose
FP6096034	Square Diverting Tub Spout
FP40120 FP10130 FP6001006	3-Function Round Hand Shower 4" Square Shower Head 60" Shower Hose

Features:



Requires Non-Diverting F1001B or F1021B valve

സ്

Integral Stops

Speed Connect (Slide Bar)



Bubble Level

Polished Chrome (CP), and Brushed Nickel (BN)



fluid by Sustainable Solutions

Email: help@sustainablesolutions.com Toll Free: 18004607019 F241235T-18 May 2025





fluid



Technical Drawing

F241235T-18

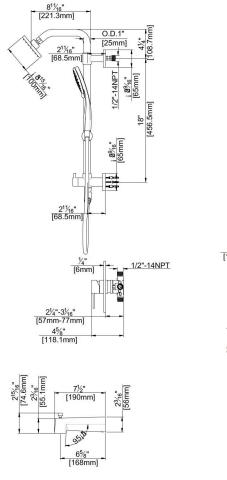

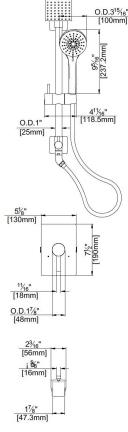

Certified to NSFF.

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig Low Flow Alternative: Showerhead and Hand Shower @ 1.5 gpm: **F241235T-18-15**

F241235T-18 May 2025

fluid by **Sustainable Solutions** Email: help@sustainablesolutions.com Toll Free: 18004607019

WEBSITE