fluid

fixtures for life

Specifications:

- Stainless Steel Construction
- → **Rainshower Head** provides a soft, gentle water flow
- **3-Function Hand Shower** \rightarrow
- \rightarrow Adjustable Slide Bar allows you to change hand shower height
- 16" Swivelling Switch Shower Arm for adjustable positioning →
- Reversible Hose Elbow installs left or right \rightarrow
- Water Inlet is located at the top installation post
- → Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve > (sold separately and available with shut off, PEX and PEX-W)

Components:

Sleeve Tube and Cap
Round Cover Plate
Wisdom Handle
26" Main Slide Bar (Round Trim)
16" Shower Arm with 6" Riser
3-Function Round Hand Shower *
8" Round Rain Showerhead
60" Shower Hose *

Wisdom Switch Shower & Hand Shower Trim Kit

F281015T



Features:



Requires Non-Diverting F1001B or F1021B valve

Integral Stops

Bubble Level ന്ന

Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

Speed Connect (Slide Bar)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

F281015T May 2025

Matte Black Specific Components

FP6001007MB Hose | FP40130MB Hand Shower



WEBSITE


Toll Free: 18004607019


fluid





Certified to NSF/ANSI 61

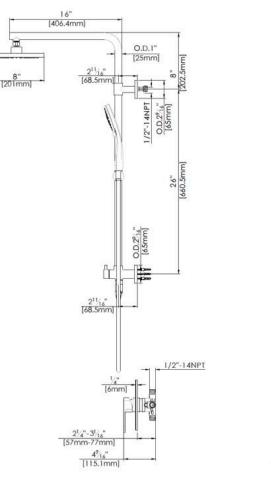

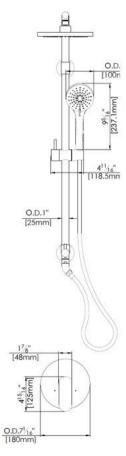

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

fluid by Sustainable Solutions Email: help@sustainablesolutions.com **Toll Free:** 18004607019

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant EPA Watersense Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig Low Flow Alternative: Hand Shower @ 1.5 gpm: F281015T-15





F281015T

