fluid

Specifications:

- Stainless Steel Construction
- 5-Function Shower Head
- 3-Function Hand Shower
- Adjustable Slide Bar allows you to change hand shower height
- > Diverting Tub Spout features slip fit installation
- > 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- > Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- → Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001035-1PB	Round Cover Plate
FP6028341	Wisdom Handle
FP933000	26" Main Slide Bar (Round Trim)
FP900208-TALL	8" Shower Arm with 6" Riser
FP40120	3-Function Round Hand Shower *
FP20100	5-Function Showerhead
FP6001006	60" Shower Hose *
FP6098034L	Curved Diverting Tub Spout

Wisdom Switch Tub, Shower & Hand Shower Trim Kit

F281070T-TALL



Features:



Requires Non-Diverting F1001B or F1021B valve



Integral Stops



Bubble Level



Speed Connect (Slide Bar)



Slip Fit (Tub Spout) Matte Black Specific Components

FP6001007MB Hose | FP40130MB Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll Free: 18004607019


F281070T-TALL May 2025

WEBSITE

fluid

Technical Drawing

F281070T-TALL

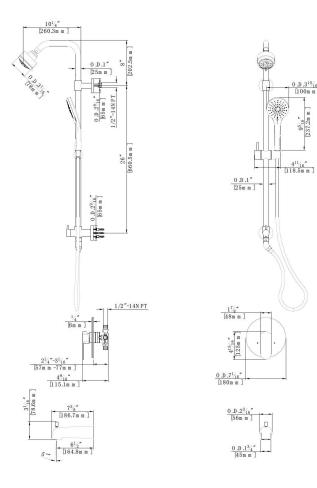





Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
Low Flow Alternative: Showerhead
and Hand Shower @ 1.5 gpm: **F281070T-TALL-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll Free: 18004607019

F281070T-TALL May 2025

WEBSITE