fluid

Specifications:

- Stainless Steel Construction
- 3-Function Hand Shower
- Diverting Tub Spout features slip fit installation
- Adjustable Slide Bar allows you to change hand shower height
- 8" Swivelling Switch Shower Arm for adjustable positioning
- > Reversible Hose Elbow installs left or right
- > Water Inlet is located at the top installation post
- > Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

| F1001T | Sleeve Tube and Cap |
|---------------|---------------------------------|
| FP6001035-1PB | Round Cover Plate |
| FP6028341 | Wisdom Handle |
| FP933000 | 26" Main Slide Bar (Round Trim) |
| FP900208-TALL | 8" Shower Arm with 6" Riser |
| FP40120 | 3-Function Round Hand Shower * |
| FP6000350 | 6" Round Shower Head |
| FP6001006 | 60" Shower Hose * |
| FP6ng8n34l | Curved Diverting Tub Shout |

Features:







Bubble Level



Speed Connect (Slide Bar)



Slip Fit (Tub Spout)

Wisdom Switch Tub, Shower & Hand Shower Trim Kit

F281071T-TALL



Matte Black Specific Components

FP6001007MB Hose | FP40130MB Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll Free: 18004607019


F281071T-TALL May 2025

WEBSITE

fluid

Technical Drawing

F281071T-TALL

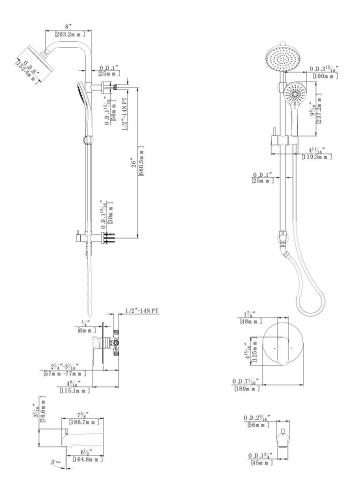





Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Hand Shower 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig
Low Flow Alternative: Showerhead
and Hand Shower @ 1.5 gpm: **F281071T-TALL-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll Free: 18004607019

F281071T-TALL May 2025

WEBSITE