fluid

fixtures for life

Specifications:

- Stainless Steel Construction
- 3-Function Hand Shower
- 5-Function Shower Head
- Adjustable Slide Bar allows you to change hand shower height
- 8" Swivelling Switch Shower Arm for adjustable positioning
- Reversible Hose Elbow installs left or right
- Water Inlet is located at the top installation post
- Built in Check Valve prevents backflow
- Requires the fluid F1001B or F1021B pressure balancing valve (sold separately and available with shut off, PEX and PEX-W)

Components:

F1001T	Sleeve Tube and Cap
FP6001033-1PB	Square Cover Plate
FP6016041	Quad Handle
FP933003	18" Main Slide Bar (Square Trim)
FP900208	8" Shower Arm with 2" Riser
FP40120	3-Function Round Hand Shower *
FP20100	5-Function Showerhead
FP6001006	60" Shower Hose *

Quad Switch Shower & Hand Shower Trim Kit

F161013T-18



Features:



Requires Non-Diverting F1001B or F1021B valve

Integral Stops

Bubble Level

Speed Connect (Slide Bar) Matte Black Specific Components FP6001007MB Hose | FP40130MB Hand Shower

Polished Chrome (CP), Brushed Nickel (BN), and Matte Black (MB)

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com Toll Free: 18004607019 F161013T-18 May 2025




fluid

pg.2

Technical Drawing

F161013T-18

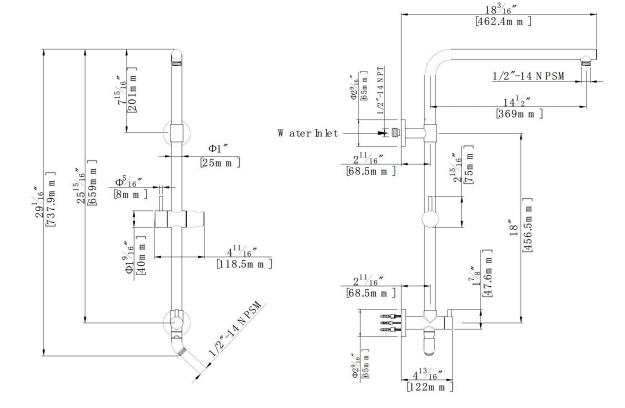

Warranty

3

UPC

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

fluid by **Sustainable Solutions Email:** help@sustainablesolutions.com **Toll Free:** 1 800 460 7019

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead and Hand Shower @ 1.5 gpm: **F161013T-18-15**

F161013T-18 May 2025

WEBSITE