fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing volume control with 2-way single handle diverting
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Cartridge Sleeve
FP6019441	Yaletown Handle
FP6001035-2PS	Round Cover Plate
FP6016008	8" Shower Arm
FP10120	4" Round Showerhead
FP40120	3-Function Hand Shower*
FA802	Slide Bar with Integral Outlet
FP6001006	60" Shower Hose*

* Matte Black kits feature the FP6001007MB Shower Hose & FP40130MB 3-Function Hand Shower

Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level

Yaletown 4" Showerhead & Hand Shower on Slide Bar Trim Kit

F194111T



Polished Chrome (CP), Brushed Nickel (BN) and *Matte Black (MB) $\,$

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019




F194111T June 2025

fluid

Technical Drawing

F194111T

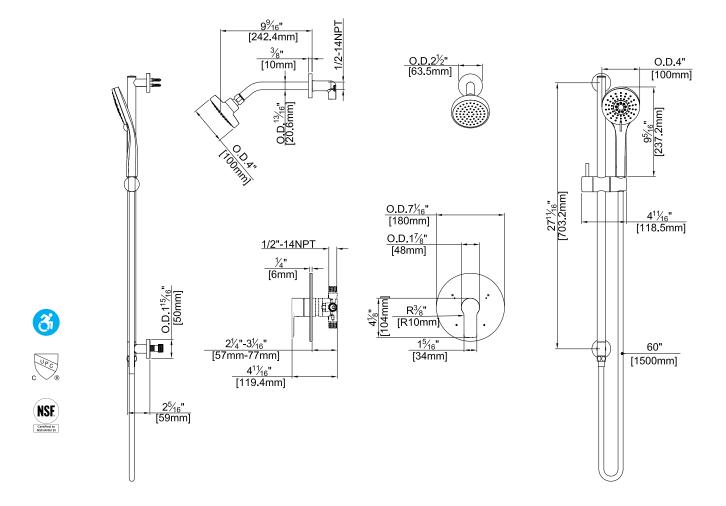

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead & Hand Shower @ 1.5 gpm: **F194111T-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com

Toll free: 1 800 460 7019



F194111T June 2025