

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, single handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W, F1960 Expansion PEX.)

Components:

F1001T	Sleeve Tube and Cap
FP6019441	Yaletown Handle
FP6001035-2PS	Round Cover Plate
FP20100	5-Function Showerhead
FP6016008	8" Shower Arm
FP6057034	Pipe Tub Spout

Yaletown 5-Function Showerhead & Tub Spout Trim Kit


F194104T



Features:

 Requires 2-way diverting F1002B or F1042B valve


 Integral Stops  Bubble Level

 Speed Connect

Polished Chrome (CP) , Brushed Nickel (BN) & Matte Black (MB)

Technical Drawing

F194104T

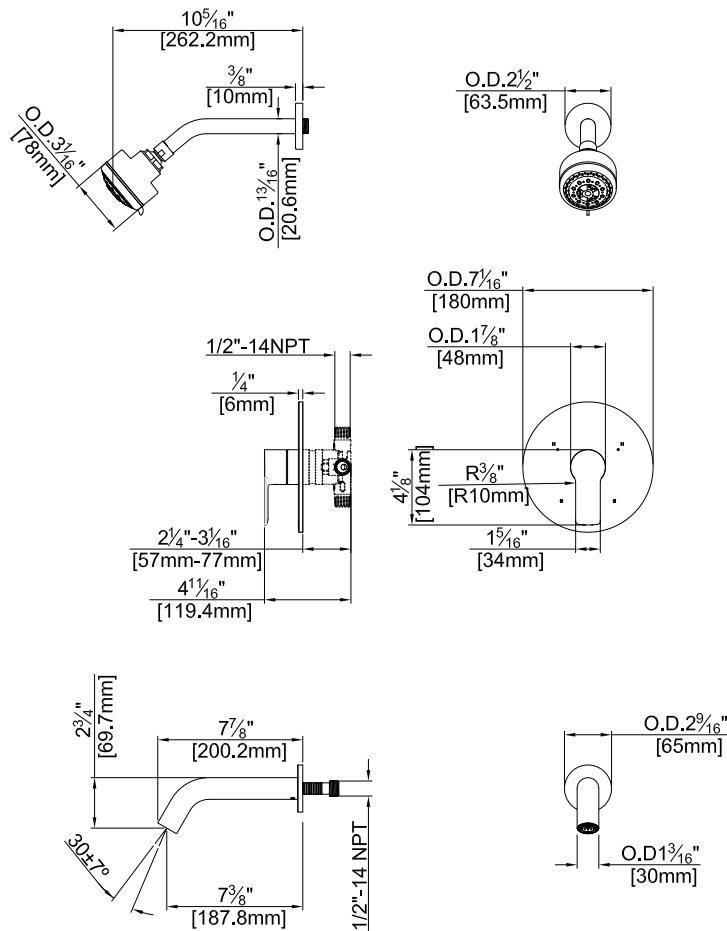

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F194104T-15**