fluid

Specifications:

- → Metal construction for durability and reliability
- Pressure balancing with 2-way, single handle diverting and temperature control
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (available in solder, PEX and PEX-W.)
- ADA compliant

Components:

- F1001TMBSleeve Tube and Cap
- FP6024041MB Blade Handle
- FP6001035MB-2PS..... Round Cover Plate
- FP20100MB......5 Function Shower Head
- FP6055035MB.....Round Tub Spout

Citi Tub & 5 Function Shower Trim Kit, (Single Handle)

F244104TMB





Requires non-diverting F1002B or F1042B valve	
O Integral Stops	📼 Bubble Level
📄 Slip fit spout	诸 ADA

Matte Black (MB)

fluid by Sustainable Solutions


Email: help@sustainablesolutions.com **Toll free:** 1-800-460-7019 F244104T March 2025

fluid

Technical Drawing

F244104T

pg 2.

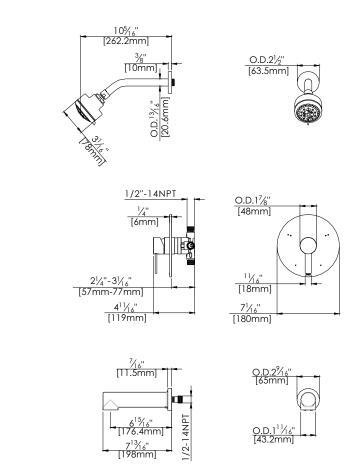

Codes and Standards: ANSI/ASME A112.18.1, CSA B125.1, IAPMO/cUPC Listed

Warranty:

3

30

NSF

Certified to

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Kit Variations:

Kit with square style cover plate & diverter handle: **F244104TMB-S**

Flow Rate:

Shower Head 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: **F244104TMB-15**

fluid by Sustainable Solutions

Email: help@sustainablesolutions.com **Toll free:** 1-800-460-7019 F244104TMB June 2025