

## Specifications:

- Metal construction for durability and reliability
- Pressure balancing with 2-way, single handle diverting and temperature control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in Solder, PEX and PEX-W.)
- ADA Compliant

## Components:

F1001TMB	.....	Cartridge Sleeve
FP6024041MB	.....	Blade Handle
FP6001035MB-2PS	.....	Round Cover Plate
FP6016008MB	.....	8" Shower Arm
FP10120MB	.....	4" Round Shower Head
FP40130MB	.....	3 Function Hand Shower
FA802MB	.....	Slide Bar with Integral Outlet
FP6001007MB	.....	60" Shower Hose


## Features:

 Requires 2-way diverting F1002B or F1042B valve

 Integral Stops

 Bubble Level

 ADA

 Speed Connect

## Citi 4" Shower Head & Hand Shower Trim Kit


F244111TMB



Matte Black (MB)

## Technical Drawing

F244111TMB

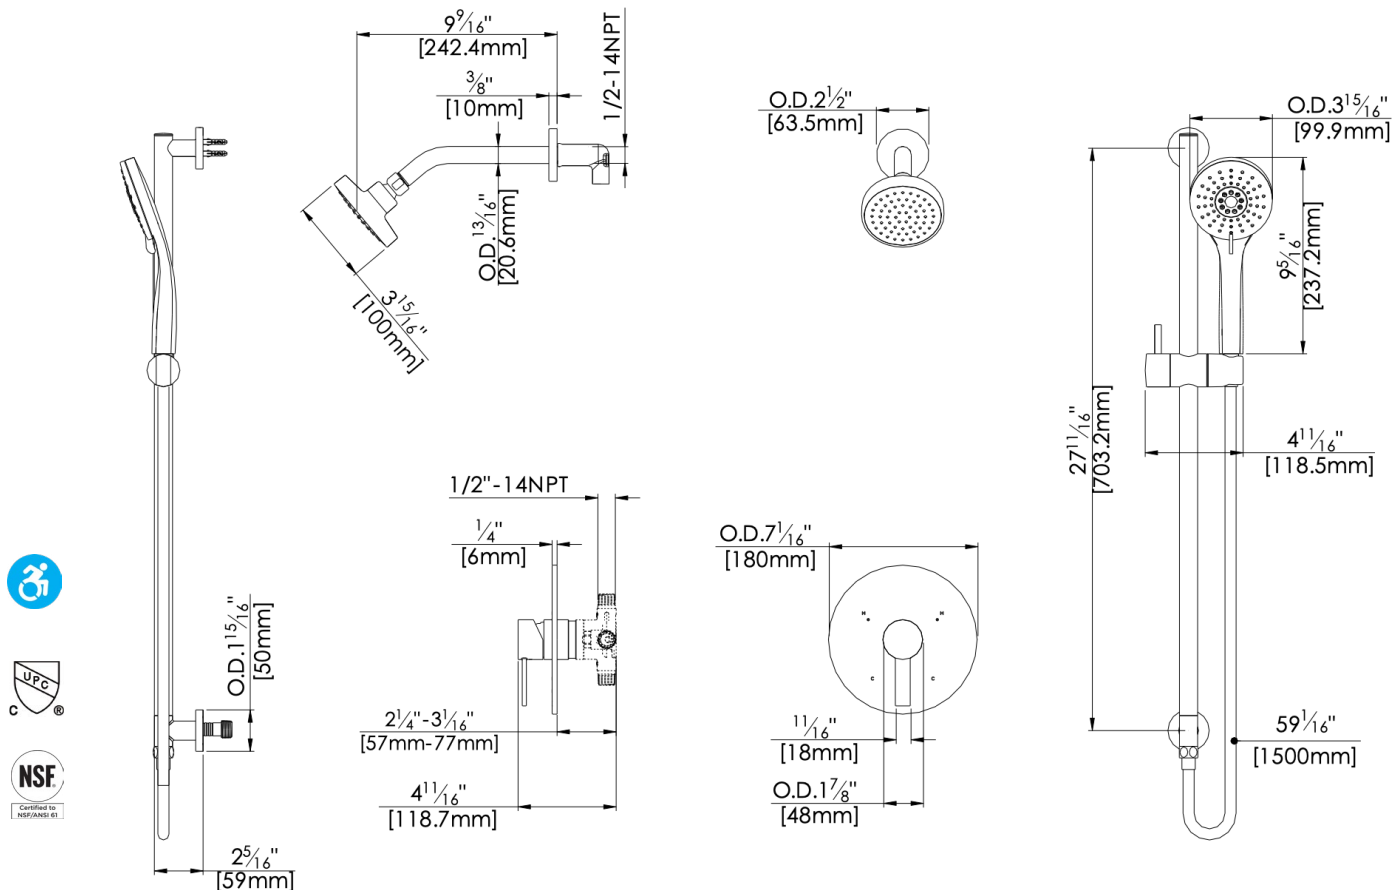

**Codes and Standards:** ANSI/ASME A112.18.1, CSA B125.1, IAPMO / cUPC Listed

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

### Kit Variations:

Kit with square style cover plate & diverter handle: **F244111TMB-S**

### Flow Rate:

Shower Head 1.8 gpm @ 60 psig  
Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head & Hand Shower @ 1.5 gpm:  
**F244111TMB-15**