

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant with Alternate Handle below
- ➔ Requires the fluid F1003B or F1023B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6028341MB	Wisdom Handle
FP801013MB	Diverter Sleeve
FP605652MB	Diverter Handle
FP6001142MB-3PB.....	Cover Plate
FP6018308MB.....	3" Ceiling Shower Arm
FP6002150MB	8" Rain Showerhead
FP40130MB	3-Function Hand Shower
FA802MB.....	Slide Bar With Integral Outlet
FP6001007MB	60" Shower Hose
FP6057034MB.....	Pipe Tub Spout

**sharing available where allowed by code

Kit with Alternate Handle: **F283216TMB-AR**



Features:

 Requires 3-way diverting F1003B or F1023B valve

 Integral Stops

 Bubble Level

 Speed Connect

Wisdom Tub & Rain Shower Trim Kit with 802 Slide Bar


F283216TMB



Matte Black (MB)

Technical Drawing

F283216TMB

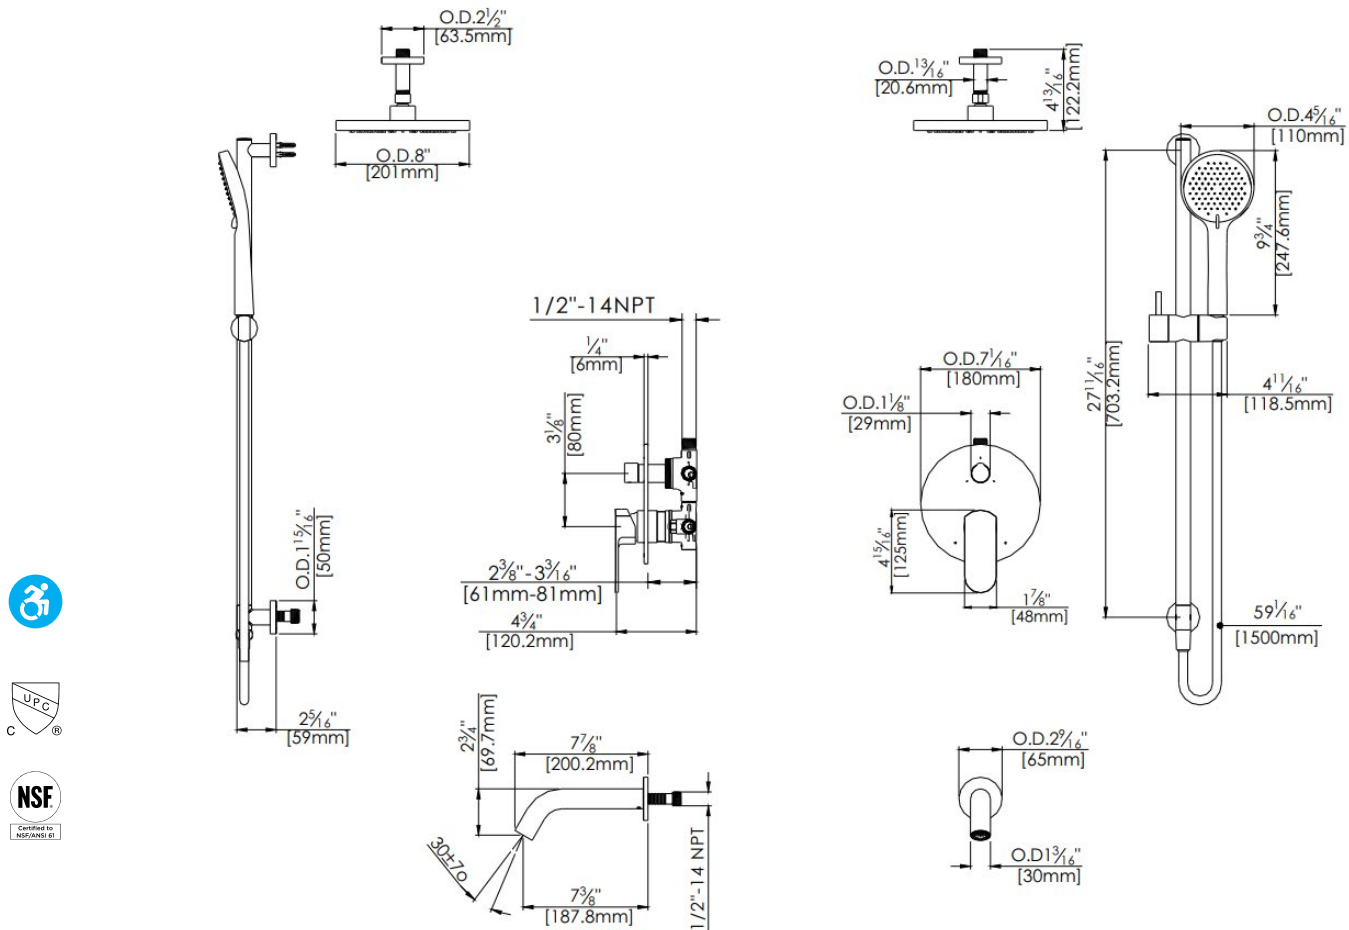

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower
@ 1.5 gpm: **F283216TMB-15**