fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)


Components:

F1001TMB	Cartridge Sleeve
FP6028341MB	Wisdom Handle
FP6001035MB-1PB	Round Cover Plate
FP40130MB	3-Function Hand Shower
FA802MB	Slide Bar with Integral Outlet
FP6001007MB	60" Shower Hose
FP6098034LMBMB	Curved Diverterting Tub Spout

Features:

Requires non-diverting F1001B or F1021B valve





Speed Connect

Wisdom Tub & Hand Shower Trim Kit with FA802 Slide Bar

F281213TMB




Matte Black (MB)

fluid

Technical Drawing


F281213TMB












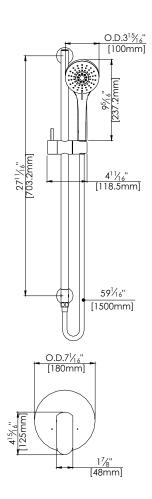

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F281213TMB-15**