

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant with Alternate Handle below
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6028341MB	Wisdom Handle
FP801013MB	Diverter Sleeve
FP605652MB	Diverter Handle
FP6001142MB-2PB.....	Round Cover Plate
FP6006008MB	16" Shower Arm
FP6002150MB	8" Rain Showerhead
FP6057034MB	Pipe Tub Spout

**sharing available where allowed by code


Kit with Alternate Handle: **F282211TMB-AR**

**Features:**

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops

 Bubble Level

 Speed Connect

Wisdom Tub & 8" Rain Showerhead Trim Kit


F282211TMB



Matte Black (MB)

Technical Drawing

F282211TMB

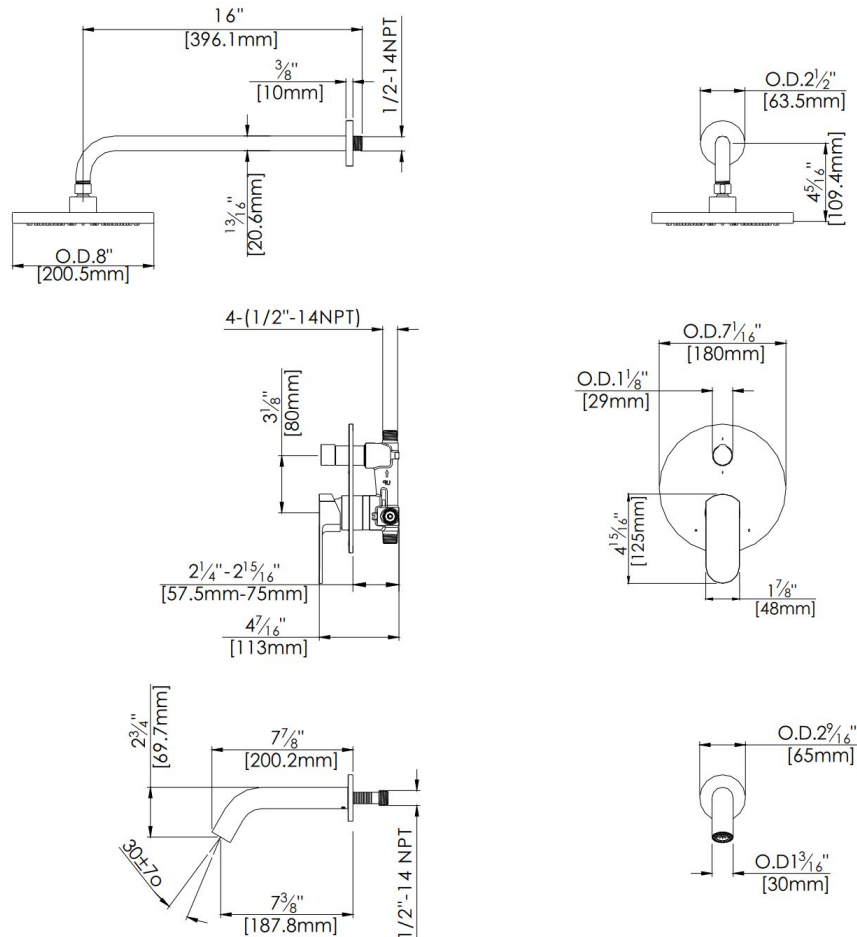

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.
2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant (with ADA handle)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Low Flow Alternative: Shower Head @ 1.5 gpm: **F282211TMB-15**