

## Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control with 3-way, two handle diverting
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ ADA compliant with Alternate Handle below
- ➔ Sharing available where allowed by code

## Components:

|                       |                                |
|-----------------------|--------------------------------|
| F1001TMB .....        | Sleeve Tube and Cap            |
| FP6028341MB .....     | Wisdom Handle                  |
| FP801013MB .....      | Diverter Sleeve                |
| FP605752MB .....      | Diverter Handle                |
| FP6001143MB-3PB ..... | Round Cover Plate              |
| FP6018308MB .....     | 3" Ceiling Shower Arm          |
| FP6002150MB .....     | 8" Rain Showerhead             |
| FP6016008MB .....     | 8" Shower Arm                  |
| FP6000350MB .....     | 6" Showerhead                  |
| FP6001007MB .....     | 60" Shower Hose                |
| FA802MB .....         | Slide Bar With Integral Outlet |
| FP40130MB .....       | 3-Function Hand Shower         |

Kit with Alternate Handle: **F283036TMB-AR**



## Features:

 Requires 3-way diverting F1003B or F1023B valve

 Integral Stops

 Bubble Level

 Speed Connect

## Wisdom Double Showerhead and 3-Function Hand Shower Trim Kit


F283036TMB



Matte Black (MB)

## Technical Drawing

F283036TMB

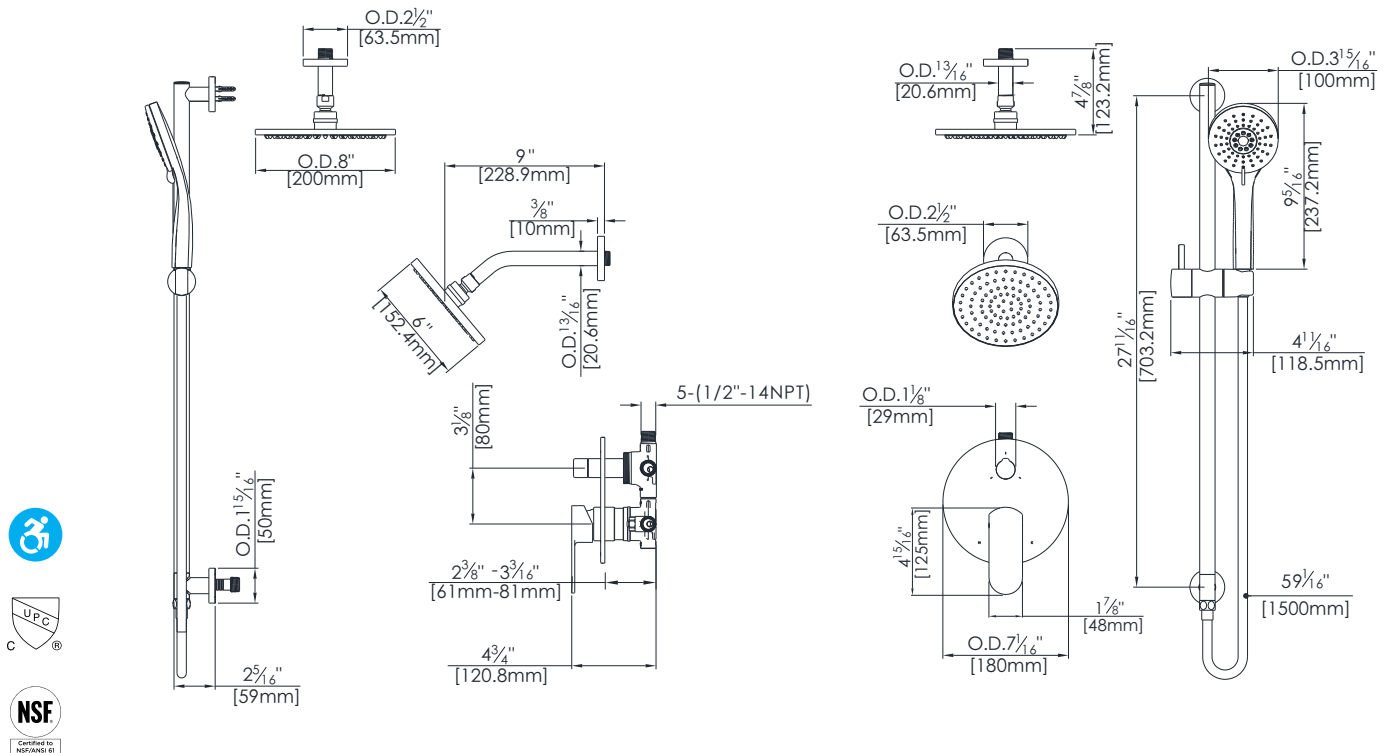

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant (with handle)

## Flow Rate:

Showerheads 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower &  
Showerhead @ 1.5 gpm:

**F283036TMB 15**