fluid

Specifications:

- > Pressure balancing volume control with 2-way, two handle diverting
- → Max-temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- → ADA compliant with Alternate Handle below
- → Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6028341MB	Wisdom Handle
FP801013MB	Diverter Sleeve
FP605652MB	Diverter Handle
FP6001142MB-2PB	Round Cover Plate
FP6006008MB	16" Shower Arm
FP6002150MB	8" Rain Showerhead
FP40130MB	3-Function Hand Shower*
FA802MB	Slide Bar with Integral Outlet
FP6001007MB	60" Shower Hose*

^{**}sharing available where allowed by code

Kit with Alternate Handle: F282025TMB-AR





& Hand Shower Trim Kit → Metal construction for durability and reliability

F282025TMB



Wisdom 8" Rain Showerhead

Features:







Bubble Level




Speed Connect


Matte Black (MB)

fluid

Technical Drawing

F282025TMB

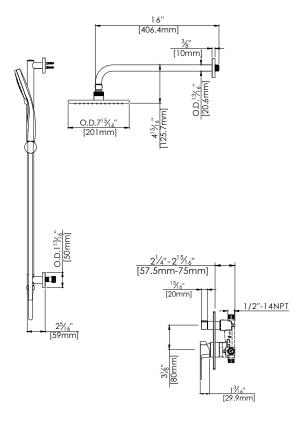

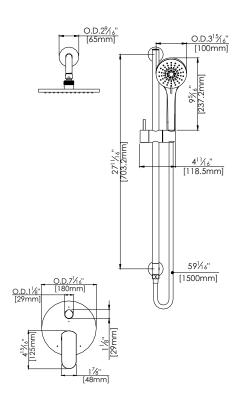







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant (with ADA handle)

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F282025TMB-15**