fluid

Specifications:

- → Metal construction for durability and reliability
- > Pressure balancing single handle diverting and volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6028341MB	Wisdom Handle
FP6001035MB-2PS	Round Cover Plate
FP20100MB	5-Function Shower Head
FA802MB	Slide Rail w/Wall Outlet
FP6016008MB	8" Shower Arm
FP40130MB	3-Function Hand Shower
FP6001007MB	60" Shower Hose

Wisdom Shower Head & **Hand Shower Trim Kit**

F284214TMB



Features:



Requires 2-way diverting F1002B or F1042B valve



Integral Stops



Bubble Level




Slip Fit Connection

Matte Black (MB)

fluid

Technical Drawing

F284214TMB

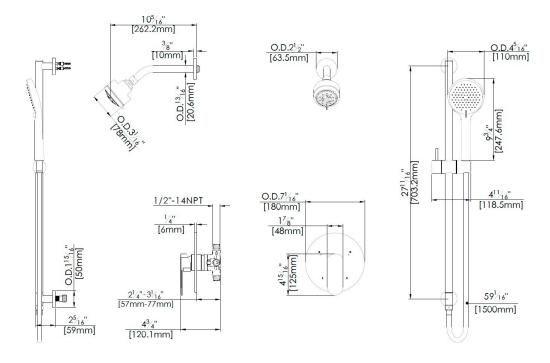







Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F284214TMB-15**