

Specifications:

- Metal construction
- Pressure balancing with volume control
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB Sleeve tube and cap
FP6016041MB Quad Handle
FP6001033MB-1PB Square Cover Plate
FP6056034MB 8" Shower Arm


Quad 5-Function Shower Head Trim Kit


F161205TMB

**Features:**

 Requires non-diverting F1001B or F1021B valve

 Integral Stops


 Bubble Level

 Speed Connect

Matte Black (MB)

Technical Drawing

F161205TMB

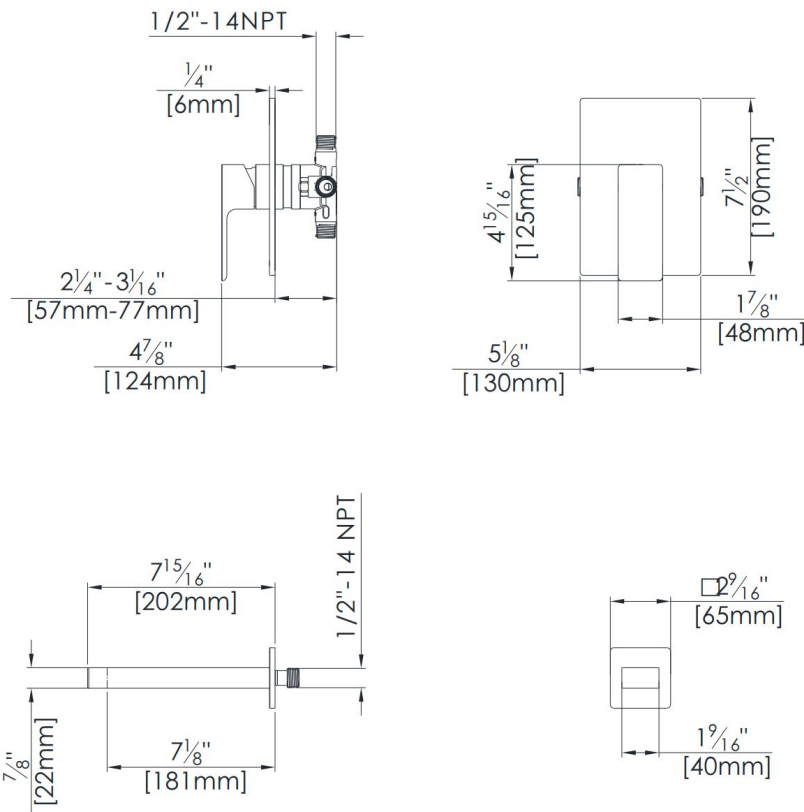

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.
2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1
CSA B125.1
IAPMO / cUPC Listed
ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Low Flow Alternative: Showerhead
@ 1.5 gpm: **F161205TMB-15**