

### Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way diverter
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

### Components:

F1001TMB .....	Sleeve Tube and Cap
FP801013MB .....	Diverter Sleeve
FP601143MB-2PB .....	Square Cover Plate
FP605752MB .....	Square Diverter Handle
FP6016041MB .....	Quad Handle
FP6007108MB .....	16" Shower Arm
FP6001150MB .....	8" Square Rain Showerhead
FP6056034MB .....	Cubed Tub Spout

\*\*sharing available where allowed by code

Kit with Alternate Handle: **F162210TMB-AS**



## Quad Tub & 8" Rain Shower Trim Kit


F162210TMB



### Features:

 Requires 2-way diverting F1012B or F1022B valve


 Integral Stops  Bubble Level

 Speed Connect

Matte Black (MB)

## Technical Drawing

F162210TMB

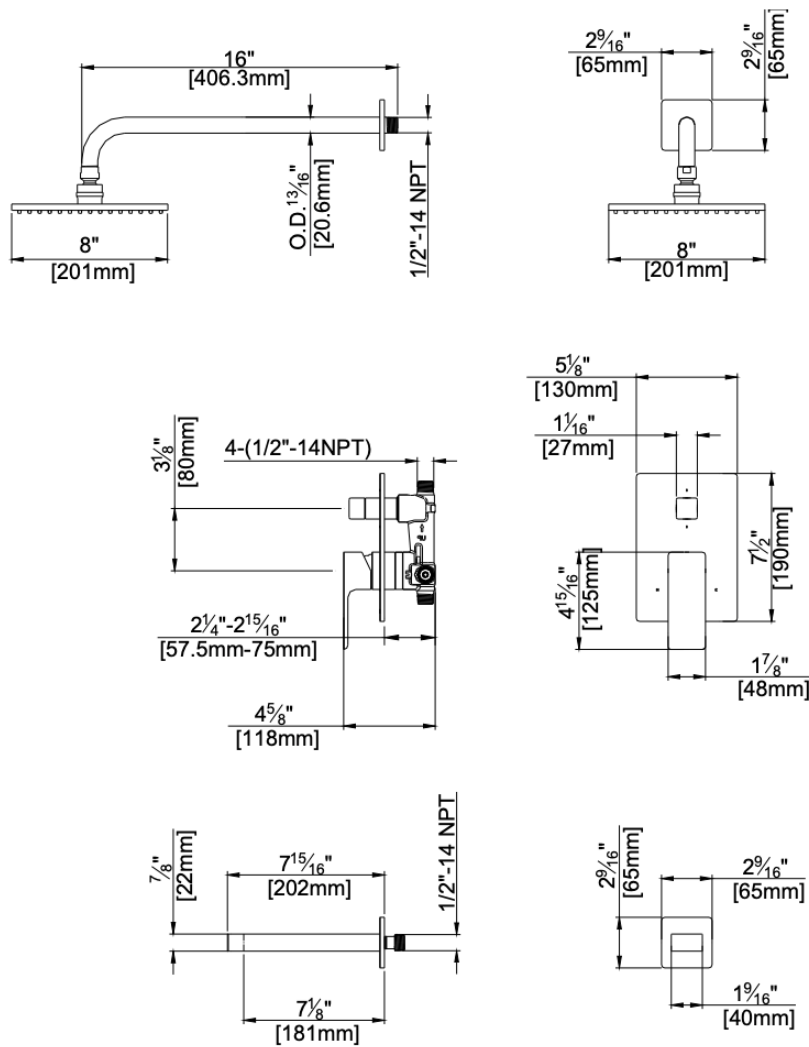

## Warranty:

Limited Lifetime Faucet Warranty  
against material and manufacturing  
defects for residential use.

2 Year Limited Warranty on all industrial,  
commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

## Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand Shower  
@ 1.5 gpm: **F162210TMB-15**