

Specifications:

- Metal construction
- → Pressure balancing with volume control
- → Maximum temperature limit stop for added safety
- > Integral stop check valves for easy maintenance
- > Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB Sleeve tube and cap FP6016041MBQuad Handle FP6001033MB-1PB......Square Cover Plate FP40130MB 3-Function Hand Shower FA803MB Slide Bar FP6098034LMB.....Curved Diverting Tub Spout

Quad Tub & Hand Shower Trim Kit

F161214TMB



Features:







Bubble Level




Matte Black (MB)

fluid

Technical Drawing

F161214TMB

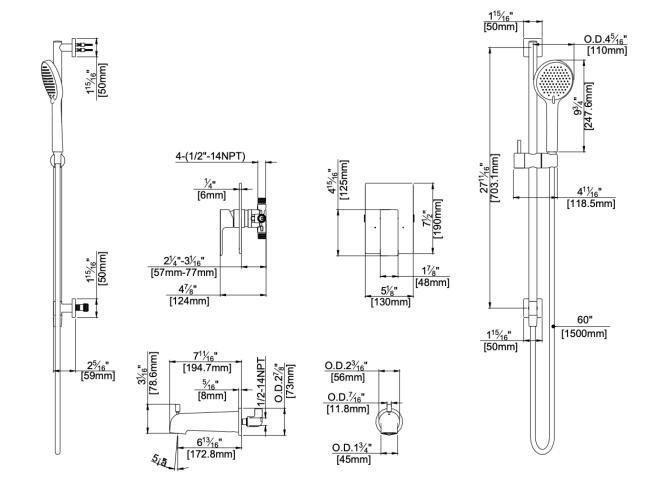

Warranty:

NSE

Certified to NSF/ANSI 61

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant

Flow Rate:

Hand Shower 1.8 gpm @ 60 psig Tub Spout 4.5 gpm @60 psig

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F161214TMB-15**