

Specifications:

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB Cartridge Sleeve
FP6016041MB Quad Handle
FP6001033MB-2PS Square Cover Plate
FP6000150MB Square showerhead
FP6027008MB 8" Shower Arm
FP6098035LMB Curved Tub Spout

Quad Tub & Square Shower Head Trim Kit

F164211TMB

**Features:**

Requires non-diverting F1002B or F1042B valve



Integral Stops



Bubble Level




Slip Fit

Matte Black (MB)

Technical Drawing

F164211TMB

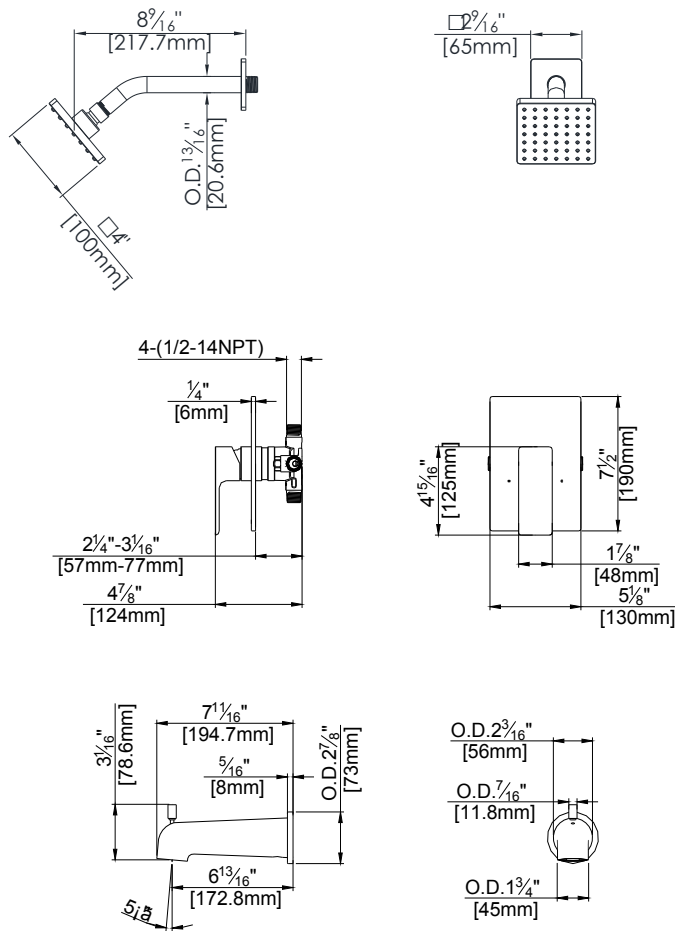

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead
@ 1.5 gpm: **F164211TMB-15**