

**Specifications:**

- ➔ Metal construction for durability and reliability
- ➔ Pressure balancing volume control
- ➔ Max-temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1002B or F1042B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)


**Components:**

F1001TMB ..... Cartridge Sleeve  
FP6016041MB ..... Quad Handle  
FP6001033MB-2PS ..... Square Cover Plate  
FP20100MB ..... 5-Function Showerhead  
FP6027008MB ..... 8" Shower Arm  
FP6098035LMB ..... Curved Tub Spout

**Quad Tub & 5-Function  
Shower Head Trim Kit**

F164213TMB

**Features:**

 Requires non-diverting F1002B or F1042B valve


 Integral Stops  Bubble Level

 Slip Fit

Matte Black (MB)

## Technical Drawing

F164213TMB

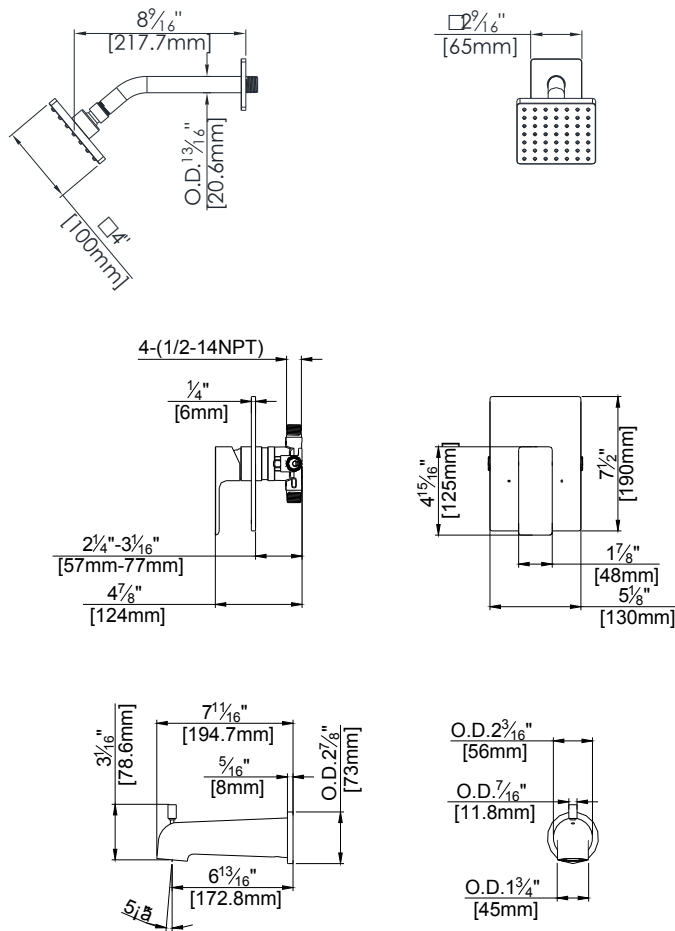

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.  
2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed

### Flow Rate:

Showerhead 1.8 gpm @ 60 psig  
Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead  
@ 1.5 gpm: **F164213TMB-15**