

Specifications:

- Metal construction
- Pressure balancing volume control with 2-way, two handle diverting
- Maximum temperature limit stop for added safety
- Integral stop check valves for easy maintenance
- Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or **sharing in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP6016041MB	Quad Handle
FP801013MB	Diverter Sleeve
FP605752MB	Diverter Handle
FP6001143MB-2PB	Square Cover Plate
FP6027008MB	8" Shower Arm
FP6000150MB	6" Showerhead
FP40130MB	3-Function Hand Shower
FA803MB	Slide Bar With Integral Outlet
FP6001007MB	60" Shower Hose*

**sharing available where allowed by code

Kit with Alternate Handle: **F162028TMB-AS**



Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops  Bubble Level

 Speed Connect

Quad 6" Showerhead & 3-Function Hand Shower Trim Kit


F162028TMB



Matte Black (MB)

Technical Drawing

F162028TMB

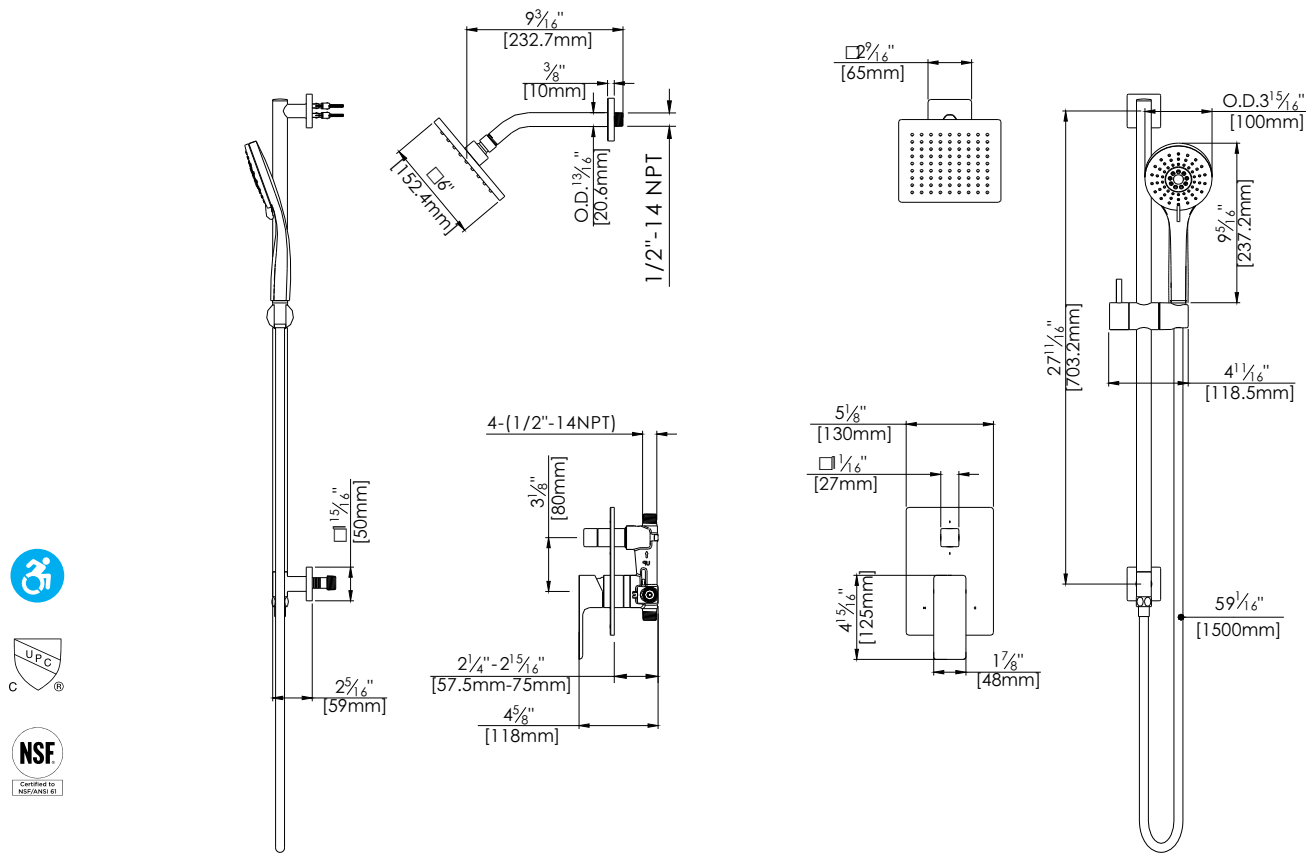

Warranty:

Limited Lifetime Faucet Warranty
against material and manufacturing
defects for residential use.

2 Year Limited Warranty on all industrial,
commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Hand Shower 1.8 gpm @ 60 psig

Low Flow Alternative: Hand
Shower & Showerhead @ 1.5 gpm:

F162028TMB-15