

## Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

## Components:

F1001TMB .....	Sleeve tube and cap
FP6016041MB .....	Quad Handle
FP801013MB .....	Diverter Sleeve
FP605752MB .....	Diverter Handle
FP601143MB-2PB .....	Square Cover Plate
FP40130MB .....	3-Function Hand Shower
FA803MB .....	Slide Bar with Integral Outlet
FP6001007MB .....	60" Shower Hose
FP6056034MB .....	Cubed Tub Spout
MB	


Kit with Alternate Handle: **F162074T-AS**



## Features:

 Requires 2-way diverting F1012B or F1022B valve

 Integral Stops  Bubble Level

 Speed Connect

## Quad Tub & Hand Shower Trim Kit with FA803 Slide Bar


F162074TMB



Matte Black (MB)

## Technical Drawing

F162074TMB

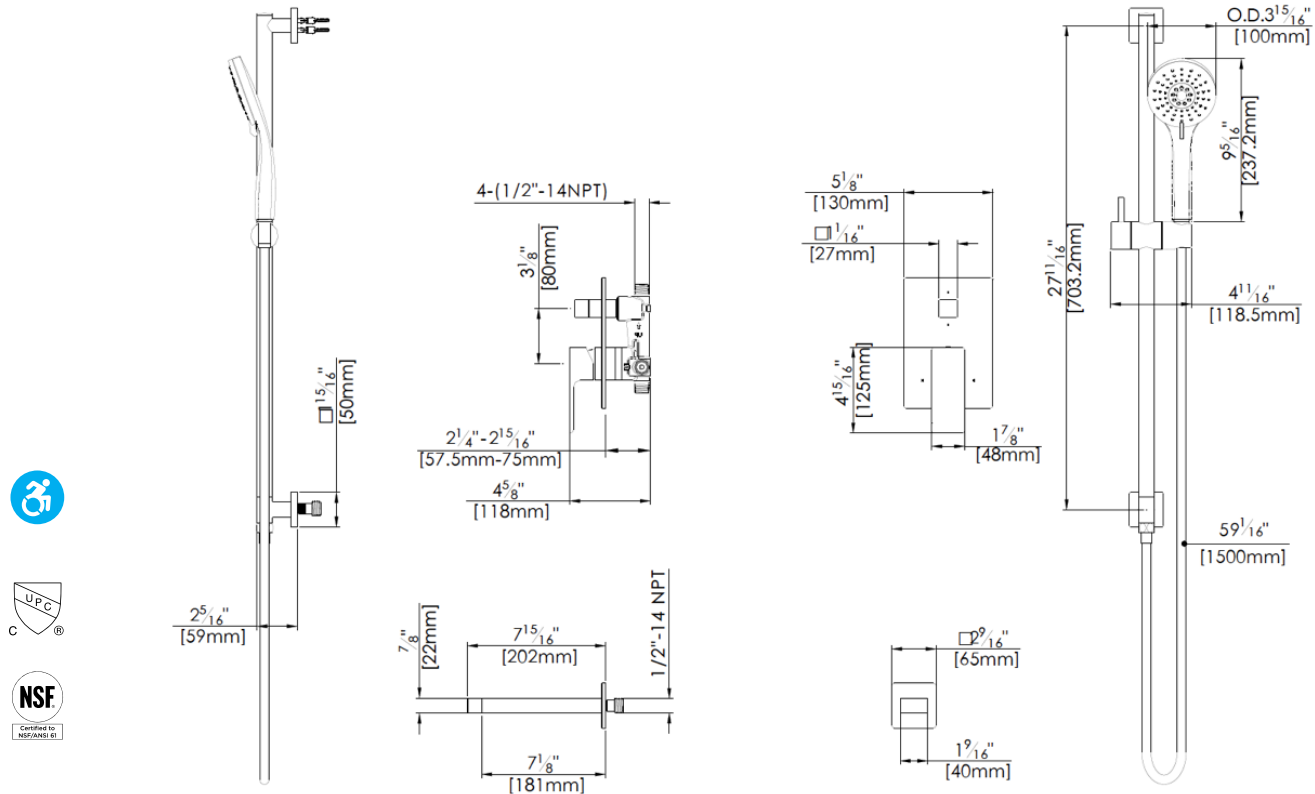

## Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

## Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

## Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Hand Shower  
@ 1.5 gpm: **F162074TMB-15**