fluid

Specifications:

- → Metal construction for durability and reliability
- → Pressure balancing volume control
- → Max-temperature limit stop for added safety
- → Integral stop check valves for easy maintenance
- → Requires the fluid F1001B or F1021B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB	Cartridge Sleeve	
FP6016041MB	.Quad Handle	
FP6001033MB-1PB	Square Cover Plate	
FP40130MB	3-Function Hand Shower	
FA803MB	Slide Bar with Integral Outlet	
FP6001007MB	60" Shower Hose	

Quad 3-Function Hand Shower Trim Kit with FA803 Slide Bar

F161019TMB



Matte Black (MB)

Features:

a	Requires non-diverting	gF100)1B or F1021B valve
0	Integral Stops		Bubble Level
Ð	Speed Connect		

F241019TMB June2025


fluid by Sustainable Solutions


fluid

Technical Drawing

F161019TMB

pg 2.

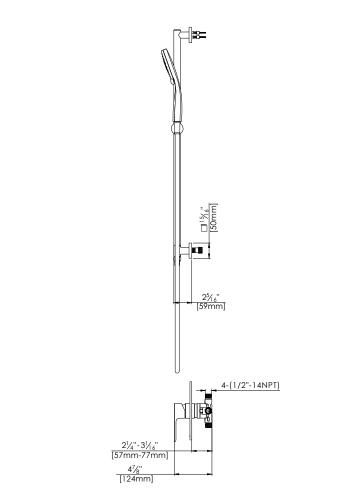

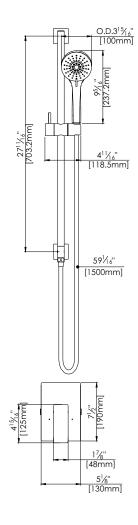



(NSE)

Certified to NSF/ANSI 61

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1 CSA B125.1 IAPMO / cUPC Listed ADA Compliant EPA Watersense Listed (excluding MB Version)

Flow Rate:

Hand Shower $1.8\,\text{gpm}\,@\,60\,\text{psig}$

Low Flow Alternative: Hand Shower @ 1.5 gpm: **F161019TMB-15**