

Specifications:

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way diverter
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available in solder, PEX and PEX-W.)

Components:

F1001TMB	Sleeve Tube and Cap
FP801013MB	Diverter Sleeve
FP601143MB-2PB	Square Cover Plate
FP605752MB	Square Diverter Handle
FP6016041MB	Quad Handle
FP6001150MB	6" Square Showerhead
FP6007108MB	8" Shower Arm
FP6056034MB	Quad / Jovian Tub Spout

Kit with Alternate Handle: **F162206TMB-AS**



Quad Tub & 6" Shower Head Trim, (Two handle) Trim Kit

F162026TMB



Features:

-  Requires 2-way diverting F1012B or F1022B valve


-  Integral Stops
-  Bubble Level

-  Speed Connect

Matte Black (MB)

Technical Drawing

F162026TMB

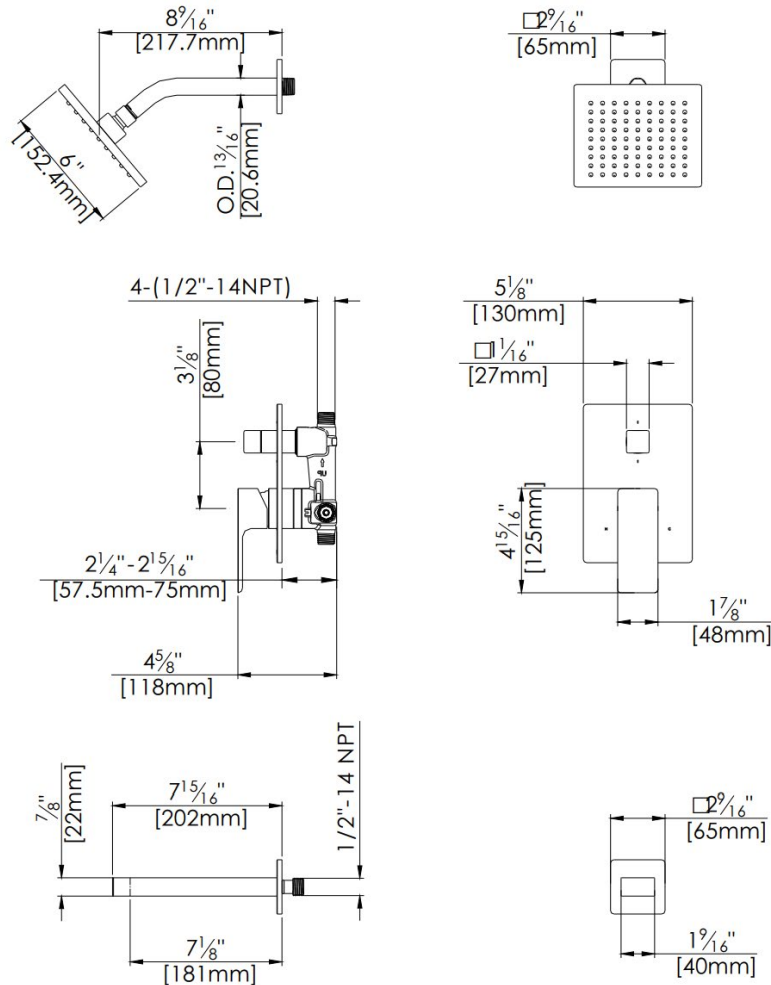

Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

2 Year Limited Warranty on all industrial, commercial and business applications.

Codes and Standards:

ANSI/ASME A112.18.1

CSA B125.1

IAPMO / cUPC Listed

ADA Compliant

Flow Rate:

Showerhead 1.8 gpm @ 60 psig

Tub Spout 4.5 gpm @ 60 psig

Low Flow Alternative: Showerhead @ 1.5 gpm: **F162026TMB-15**