

**Specifications:**

- ➔ Metal construction
- ➔ Pressure balancing volume control with 2-way, two handle diverting
- ➔ Maximum temperature limit stop for added safety
- ➔ Integral stop check valves for easy maintenance
- ➔ Requires the fluid F1012B or F1022B pressure balancing valve, (sold separately and available with shut off or \*\*sharing in solder, PEX and PEX-W.)

**Components:**

F1001TMB .....	Sleeve Tube and Cap
FP6016041MB .....	Quad Handle
FP801013MB .....	Diverter Sleeve
FP605752MB .....	Diverter Handle
FP6001143MB-2PB .....	Square Cover Plate
FP6007108MB .....	16" Shower Arm
FP6001150MB .....	8" Square Rain Showerhead
FP40130MB .....	3-Function Hand Shower*
FA803MB .....	Slide Bar with Integral Outlet
FP6001007MB .....	60" Shower Hose*

\*\*sharing available where allowed by code

Kit with Alternate Handle: **F162025TMB-AS**


**Quad 8" Rain Showerhead & Hand Shower Trim Kit**

F162025TMB

**Features:**

 Requires 2-way diverting F1012B or F1022B valve


 Integral Stops  Bubble Level

 Speed Connect

Matte Black (MB)

## Technical Drawing

F162025TMB

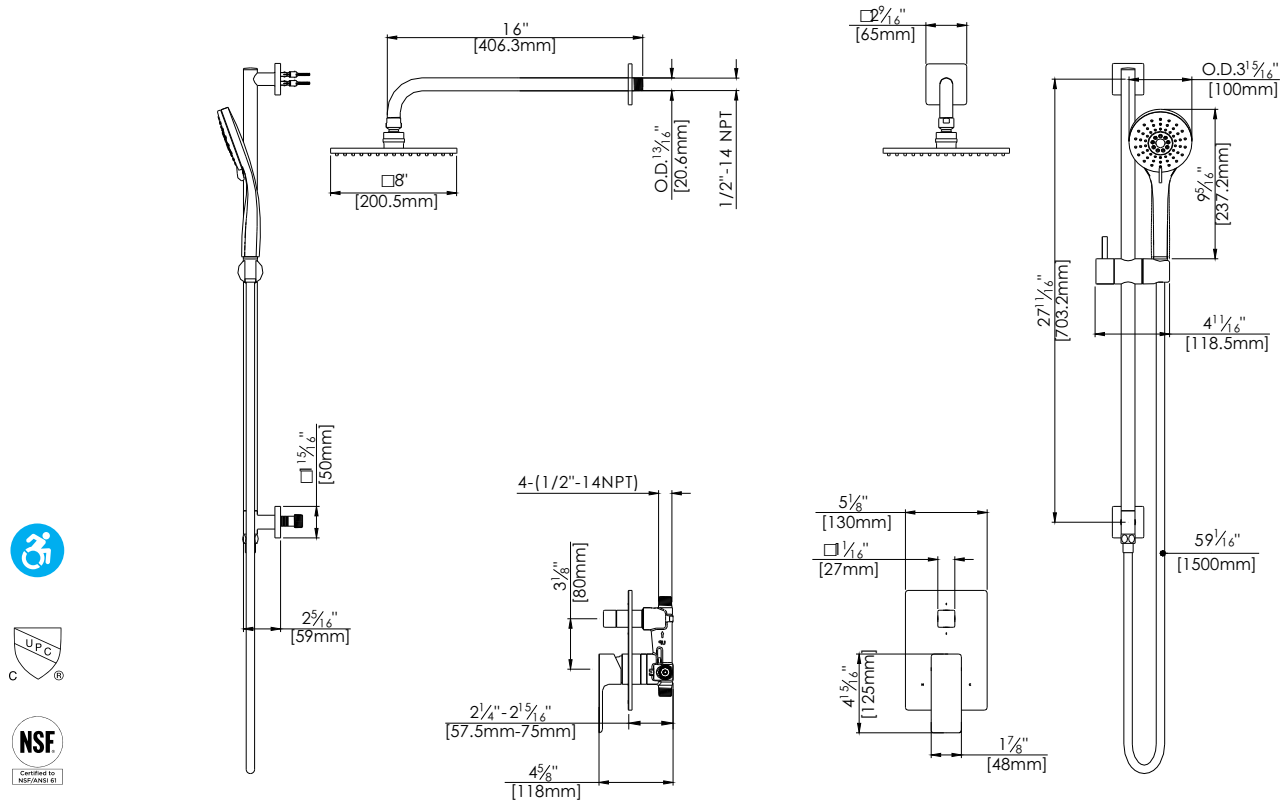

### Warranty:

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.  
2 Year Limited Warranty on all industrial, commercial and business applications.

### Codes and Standards:

ANSI/ASME A112.18.1  
CSA B125.1  
IAPMO / cUPC Listed  
ADA Compliant (with ADA handle)

### Flow Rate:

Showerhead 1.8 gpm @ 60 psig  
Hand Shower 1.8 gpm @ 60 psig  
Low Flow Alternative: Hand Shower @ 1.5 gpm: **F162025TMB-15**